

15-065-01676-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. BOX 17027
Wichita, Kansas 67217
NORTH

Graham County, Sec. 3 Twp. 10 Rge. 21 (XX) (W)

Location as "NE/CNW&SW" or footage from lines. SW NE SW
Lease Owner Rocket-Schusterman Oil Account
Lease Name Miller Well No. 5
Office Address 1209 Mid Continent Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed December 12 19 50
Application for plugging filed September 7 19 73
Application for plugging approved September 10 19 73
Plugging commenced December 27 19 73
Plugging completed December 27 19 73
Reason for abandonment of well or producing formation Depleted

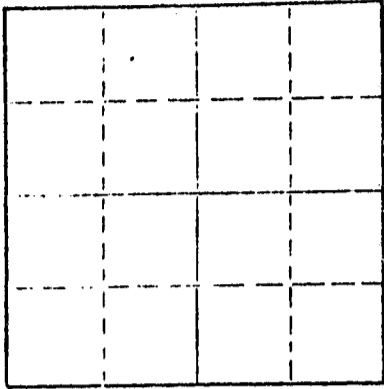

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Arbuckle Depth to top 3839' Bottom Total Depth of Well 3844 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	oil and water	3839'	3844'	5 1/2"	3841'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with 3 sax hulls and 25 sax cement; 30 gel, 60 sax cement. Shut in pressure 250# with maximum pressure 600#. Shut in pressure on annulus 500#. Plugged with casing in hole and no recovery.

RECEIVED
STATE CORPORATION COMMISSION

MAR 1 1974

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Company and company personnel.
Address

STATE OF Oklahoma COUNTY OF Tulsa, ss.

R. J. Davis (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledgo of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Davis
1209 Mid Continent Building, Tulsa, Okla. 74103
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of February, 1974

My commission expires May 23, 1974

Opal M. Perry
Notary Public.

15-065-01676-0000

MILLER NO. 5 WELL

LOCATION: SW $\frac{1}{4}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 3-109-21W
Graham County, Kansas

OPERATOR: Anderson-Prichard Oil Corp.

CONTRACTOR: Birmingham-Bartlett Drilling Co.

SURFACE CASING: Ran 11 jts., 247' 8-5/8" casing cemented
at 246' with 175 sacks bulk cement & 2 c.c.

OIL STRING: Ran 122 jts., 3845' 5 $\frac{1}{2}$ " 14# casing cemented
at 3841' with 125 sacks bulk cement.

SPOUDED: 11-27-50
COMPLETED: 12-9-50

LOG

(Figures indicate bottom of formation)

0 to 50	Surface clay and sand
785	Shale and shells
1320	Shale, shells & sand
1480	Sand
1670	Shale and shells
1752	Shale and red bed
1795	Anhydrite
2210	Shale
2670	Lime and shale
3025	Shale
3145	Shale and shells
3240	Shale
3375	Shale and lime
3844	Lime
3844	Total Depth.

RECEIVED
STATE CORPORATION COMMISSION

SEP 10 1973

CONSERVATION DIVISION
Wichita, Kansas

The undersigned Richard Hindery of the Birmingham-Bartlett Drilling Co. hereby certifies that the above is a true and correct log of the formations encountered in drilling the Miller No. 5 well as shown on the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.

BY Richard Hindery

Subscribed and sworn before me
this 11th day of December, 1950.

Vivian J. Jenger
Notary Public

My commission expires November 29, 1954.

