

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 23 Twp. 10 Rge. 21 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines SE SE SW

Lease Owner Trans Era Petroleum, Inc.

Lease Name Noah Well No. 2

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed 7/31/54 19

Application for plugging filed 7/30/54 19

Application for plugging approved 7/30/54 19


Plugging commenced 7/31/54 19

Plugging completed 7/31/54 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

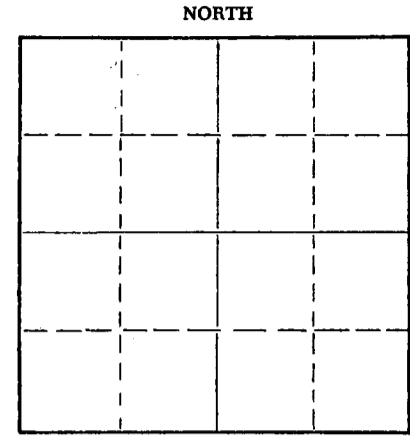

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3882 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	188'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGING RECORD

Filled hole with heavy mud to 180', set first plug at 180' with one-half sack of hulls and fifteen sacks of cement used. Filled hole with mud to 40', set second plug at 40' with one-half sack of hulls and ten sacks of cement used.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Trans Era Petroleum, Inc.

Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.

H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. R. Michaelis

Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of August, 1954


My commission expires 1-30--57.

Margie Cooper
Notary Public.

PLUGGING
FILE SEC 23 T 10 R 21W
BOOK PAGE 33 LINE 17

RECORDED

08-11-54



Trans Era Petroleum, Inc.
Noah #2

SE SE SW 23-10-21
Graham County, Ks.

Total Depth: 3882'
Comm. 7/20/54
Comp. 7/31/54

Casing

Cement

8 5/8" Set @ 183'

140 sacks of Bulk

Formation	Depth
Sand-clay	100
Clay-shale	188
Shale-sand-shale	930
Shale-sand-red bed	1530
Red bed	1660
Anhydrite	1701
Shale-shells	1865
Shale	2150
Shale-lime	3474
Lime	3770
Lime-shale	3882'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

See City

Subscribed and sworn to before me this 9th day of August, 1954.

Margie Cooper
Notary Public

My commission expires: 1-30-57.

REC

23-10-21
526