


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

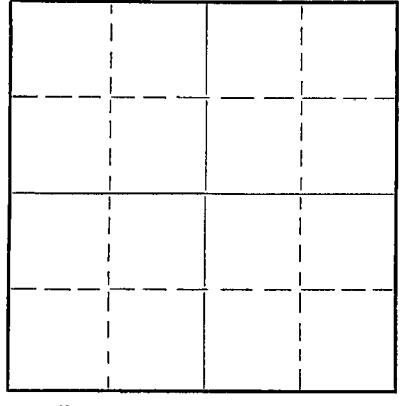

Locate well correctly on above
Section Plat

Graham County, Sec. 2 Twp. 10S Rge. 21W (X) (W)

Location as "NE/CNW 1/4 SW 1/4" or footage from lines SW, SW, NE

Lease Owner Jones, Shelburne & Farmer, Inc.

Lease Name Sutor Well No. 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Lost Hole

Date well completed October 24 19 50

Application for plugging filed October 24 19 50

Application for plugging approved October 24 19 50

Plugging commenced October 24 19 50

Plugging completed October 24 19 50

Reason for abandonment of well or producing formation Lost Hole

If a producing well is abandoned, date of last production Never Produced 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3845 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	165'	None
				5 1/2"	3840'	1650'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Bottom joint of casing was knocked off drilling up a bailer.
- Hole was filled to 3,800' with crushed rock.
- Four sacks cement mixed and dumped on top of rock.
- Pipe shot at 2,500' and 100 barrels heavy mud pumped into hole.
- Shot pipe at 2,240' and spotted oil.
- Shot pipe at 1,650' and pulled same.
- Filled hole with heavy mud.
- Set rock bridge at 160 feet.
- Mixed twenty sacks cement and dumped on rock bridge filled hole with mud to 20' from top.
- Mixed ten sacks of cement and filled hole to top with same.

STATE CORPORATION COMMISSION
NOV 1 1950
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Jones, Shelburne & Farmer, Inc.
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss. John O. Farmer (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 31st day of October, 19 50.

Phyllis Bethany
Notary Public.

My commission expires June 3, 1953

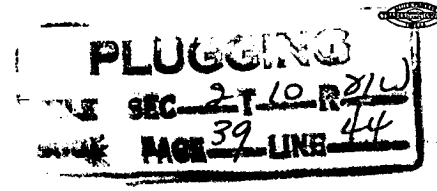

Jones, Shelburne & Farmer, Inc.

Russell, Kansas

CONTRACTOR'S VERIFIED LOG

Operator JONES, SHELBURNE & FARMER, INC Farm Name SUTOR Well No 1
 Location SW SW NE SECTION 2-109-21W
 Pool Name _____ County GRAHAM State KANSAS
 Commencement Date May 25, 1950 Completion Date June 5, 1950
 Log of Well _____

Depth		Formation	Deviation from vertical (degrees)	Remarks
From	To			
0	115	Shale		
115	765	Shale & Shells		
765	1155	Sand & Shale		
1155	1515	Shale & Shells		
1515	1545	Anhydrite		
1545	2390	Shale & Shells		
2390	3520	Lime & Shale		
3520	3843	Lime		
	3843	Total Depth		

RECEIVED
 STATE CORPORATION COMMISSION
 NOV - 1 1950
 CONSERVATION DIVISION
 - Wichita, Kansas

PLUGGING
 SEC 2 T10 R2W
 PAGE 39 LINE 44

