


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
State Required Affidavit
Must be Delivered Report to
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217

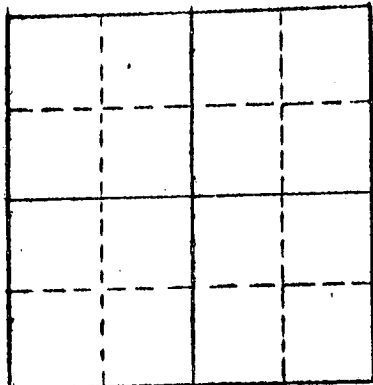

Locate well correctly on above
Section Plat

Rooks County, Sec. 24 Twp. 10 Rge. 20 (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines NW SE NE
Southern States Oil Co.
Lease Owner _____
Lease Name Sutor A#10 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 7/23/74 _____ 19____
Plugging completed 7/26/74 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3835 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	192	none
				5 1/2"	3767	506'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded to 3750' and ran 5 sacks cement.
Shot pipe at 572', 510', pulled 17 joints of 5 1/2" casing.
Allied pumped 2 sacks hulls, 20 sacks mud and 100 sacks cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

AUG 19 1974

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS

Subscribed and Sworn to before me this 31st day of July 1974



MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

(Address) Margaret Melcher
Notary Public.

15-163-03909-0000


COMPANY **Murfin Drilling Co.**

SEC. 24 T. 19 R. 20W
LOC. NW SE NE

FARM **Sutor** NO. 10

TOTAL DEPTH **3835'**
COMM. **2-25-53** COMP. **3-16-53**
SHOT OR TREATED
CONTRACTOR **Murfin Drilling Co.**
ISSUED

COUNTY **Rooks**
KANSAS



CASINO

20 10
15 8 5/8 195'
12 6
13 5 1/2 ~~3767~~ 3767

ELEVATION **2212 DF**

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

- 20 Sand
- 160 Shale
- 430 Shale & Shells
- 620 Sand & Shale
- 780 Shale
- 1085 Sand
- 1160 Shale & Shells
- 1290 Sand
- 1615 Red bed - Shale
- 1650 Anydrite
- 1870 Red rock - Shells
- 1940 Shale - Shells
- 2290 Shale - Shells
- 3507 Lime - Shale
- 3585 Lime
- 3745 Lime - Shale
- 3771 Lime
- 3777 Arb.
- 3835 (Arb.) Lime
- 3835 T.D.

RECEIVED
STATE CORPORATION COMMISSION
JAN 25 1974
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas
County of Sedgwick

I, W. R. Murfin of the Murfin Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Sutor #10 well.

Subscribed and sworn to before me this 20th day of May 19 53

My Commission Expires: 6-4-55
Abby Heimerman
NOTARY PUBLIC