

15-065-00349-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Graham County, Sec. 13 Twp. 10 Rge. 22 (E) (W)

Location as "NE/CNW&SW" or footage from lines SE SE NW
Lease Owner Victor Drilling Company
Lease Name Noah Well No. 1
Office Address 301 Koch Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 5, 19 52
Application for plugging filed November 10, 19 52
Application for plugging approved 19
Plugging commenced November 5, 19 52
Plugging completed November 5, 19 52
Reason for abandonment of well or producing formation Dry

NORTH

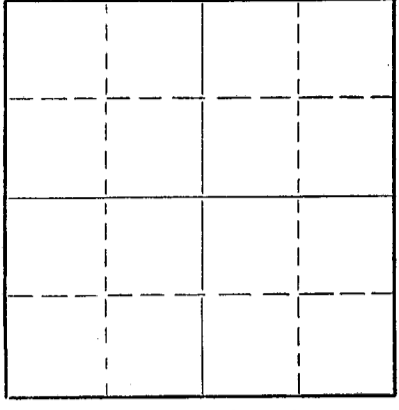

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Unknown
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3945 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	188	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
4 set bottom plug @ 165' put 1/2 sack
hulls and 15 sacks of cement. Set top
plug @ 40' Put in 1/2 sack hulls and 10
sack of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Musgrove Petroleum Corporation
Address 518 Petroleum Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Gordon L. Koelling (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gordon L. Koelling
518 Petroleum Bldg, Wichita, Kansas
(Address)



SUBSCRIBED AND SWORN to before me this 10th day of November, 19 52
September 24, 1956
Notary Public.

PLUGGING
FILE SEC-13-T-10-R-202
BOOK PAGE 52 LINE 14

CONSERVATION DIVISION
Wichita, Kansas
24-2675-5 2-52-20M
11-11-52

CONTRACTOR'S WELL LOG

COMPANY: Victor Drilling Company
 CONTRACTOR: Musgrove Petroleum Corporation
 FARM: Noah #1
 LOCATION: SE SE NW Section 13-10-22
 Graham County, Kansas

COMMENCED: October 21, 1952
 COMPLETED: November 5, 1952

0	20	Surface Clay
20	45	Shale and Sand
45	525	Shale and Shells
525	1290	Sand and Shale
1290	1480	Red Bed, Shell and Shale
1480	1665	Shale and Shells
1665	1710	Anhydrite
1710	1810	Shale
1810	2025	Shale and Lime
2025	2230	Shale and Brown Lime
2230	2962	Lime and Shale
3190	3823	Lime
3823	3843	Shale
3843	3854	Cherty Conglomerate
3854	3875	Cherty Lime
3875	3915	Cherty Conglomerate
3915	3945	Lime
	3945	Rotary Total Depth

Set 188' of 8 5/8" of surface casing, cemented with 130 sacks of cement.

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

RECEIVED
 STATE COMMISSION
 NOV 11 1952
 CONDELL COUNTY
 WICHITA, KANSAS

I, GORDON L. KOELLING, do hereby certify that the above and foregoing is a true and correct copy of the log of the Noah #1 Section 13-10-22, Graham County, Kansas, as reflected by the files of the Musgrove Petroleum Corporation.

MUSGROVE PETROLEUM CORPORATION

BY: Gordon L. Koelling
 Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 10th day of November, 1952.

Thomas R. Stumpe
 Notary Public

My Commission Expires: September 24, 1956.

