

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION WELL PLUGGING RECORD K.A.R. 82-3-117

Form CP-4 December 2003 Type or Print on this Form Form must be Signed All blanks must be Filled

Lease Operator: COLT ENERGY, INC
Address: P O BOX 388, IOLA, KS 66749
Phone: (620) 365-3111 Operator License #: 5150
Type of Well: OIL DH VENT Docket #:
The plugging proposal was approved on: 10/07/09
by: MIKE HEFFERN (KCC District Agent's Name)
Is ACO-1 filed? Yes No If not, is well log attached? Yes No
Producing Formation(s): List All (If needed attach another sheet)
SQUIRREL Depth to Top: 968 Bottom: 975 T.D. 1015

API Number: 15-031-22,460 -0000
Lease Name: BEARD #1
Well Number: C5
Spot Location (QQQQ): SW - NW - SE - NW
1815 Feet from North / South Section Line
1485 Feet from East / West Section Line
Sec. 1 Twp. 23 S. R. 16 East West
County: COFFEY
Date Well Completed: DRY/PLUGGED
Plugging Commenced: 10/7/09
Plugging Completed: 10/07/09

Show depth and thickness of all water, oil and gas formations.


Table with 7 columns: Oil, Gas or Water Records (Formation, Content), Casing Record (Surface Conductor & Production) (From, To, Size, Put In, Pulled Out). Rows include SURFACE (7" casing, 40' put in) and NO PRODUCTION STRING.

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

COLT PULLING UNIT RAN 1" TO TD. CONSOLIDATED ESTABLISHED CIRCULATION MIXED & PUMPED 20SXS AT TD.
PULLED 1" TO 550' PUMPED 20SXS CEMENT. PULLED 1" TO 250' PUMPED 45SXS TO SURFACE.
PULLED REMAINING 1" TUBING TOPPED WELL OFF WELL PLUGGED W/TOTAL OF 85SXS 50/50 POZ MIX CEMENT.

Name of Plugging Contractor: CONSOLIDATED OIL WELL SERVICES License #: 33961
Address: P O BOX 884 CHANUTE, KS 66720
Name of Party Responsible for Plugging Fees: COLT ENERGY, INC
State of Kansas County, Allen, ss. DENNIS KERSHNER

(Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

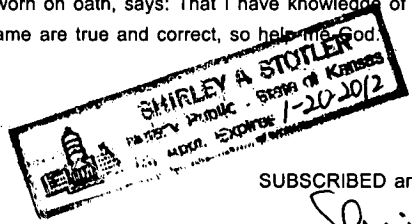

(Signature) Dennis Kershner
(Address) P O Box 388, Iola, Ks 66749

SUBSCRIBED and SWORN TO before me this 28th day of October, 2009
Shirley A Stotler My Commission Expires: 1-20-2012
Notary Public