


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

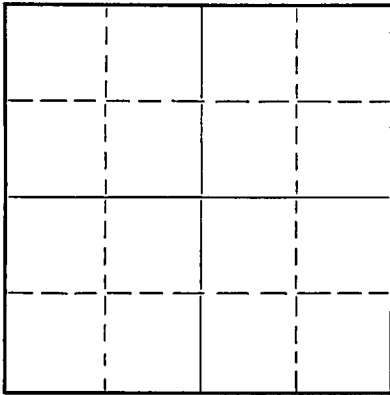

Locate well correctly on above  
Section Plat

Graham County. Sec. 10 Twp. 10S Rge. (E) 21 (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SE  
Lease Owner Jones, Shelburne & Farmer, Inc.  
Lease Name Mc Intire Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 3:30 5/24/50 19  
Application for plugging filed 5/24/50 19  
Application for plugging approved 5/24/50 19  
Plugging commenced 5/24/50 19  
Plugging completed 5/24/50 19  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production Never Produced 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation Depth to top Bottom Total Depth of Well 3860 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	180'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Hole was filled with heavy mud,
- Halliburton plug pushed to 135 feet.
- Fifteen sacks of cement mixed and spotted on top of plug.
- Second Halliburton plug pushed to 30 feet.
- Ten sacks of cement mixed and hole filled to top.

05-26-50

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to JONES, SHELBURNE & FARMER, INC.  
Address Russell, Kansas


STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
John O. Farmer (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 25th day of May, 1950.

Phyllis Bethany  
Notary Public.

My commission expires June 3, 1953



# Jones, Shelburne & Farmer, Inc.

Russell, Kansas

## CONTRACTOR'S VERIFIED LOG

Operator Jones, Shelburne & Farmer, Inc. Farm Name 10-10-21 Well No 1

Location SW SW SE SECTION 10-10-21

Pool Name WILDCAT County CLAY State KANSAS

Commencement Date May 15, 1950 Completion Date May 24, 1950

### Log of Well

Depth		Formation	Deviation from vertical (degrees)	Remarks
From	To			
0	155	Surface Clay to Shale		
155	370	Shale		
370	800	Shale and Shells		
800	1160	Sand and Shale		
1160	2060	Shale and Shells		
2060	2120	Salt		
2120	2305	Shale and Shells		
2305	3570	Lime and Shale		
3570	3770	Lime		
3770	3830	Lime and Shale		
3830	3860	Lime and Chert		
	3860	Total Depth		
		Dry and Abandoned		

10-10-21  
7-42

