


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

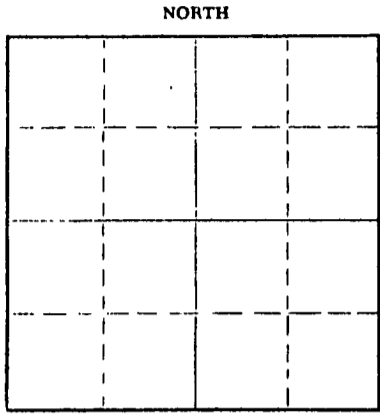

Locate well correctly on above
Section Plat

Graham County, Sec. 12 Twp. 10S Rge. 21W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner Don E. Pratt
Lease Name Beiker Well No. 7
Office Address P.O. Box 370, Hays, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed January 13 19 65
Application for plugging filed January 13 19 65
Application for plugging approved January 13 19 65
Plugging commenced January 13 19 65
Plugging completed January 13 19 65
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3840 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	168'	--0--

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 540' w/20 sx cement,
plug @ 165' w/20 sx cement,
plug @ 40' w/10 sx cement,
1 sx hulls.

RECEIVED
STATE CORPORATION COMMISSION

FEB 3 1965
02-03-65

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling
Address Box 173--Russell, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Maxine V. Head (employee of owner) or ~~owner or operator~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Head
1720 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of January, 1965

Jean Holloway
Notary Public.

15-065-30010-0000

DRILLERS LOG

No. 7 Beiker

CASING RECORD: 8 5/8" @ 168' w/125 sx cement

COMPANY: Don E. Pratt

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: January 7, 1965

COMPLETED: January 13, 1965

DESCRIPTION: SE NW SE 12-10S-21W Graham Co., Kans.

ELEVATION: 2210 DF 2213 RB

TOTAL DEPTH: 3840'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale	0	1200	
Sand	1200	1400	
Shale	1400	1696	
Anhydrite	1696	1738	
Shale & Shells	1738	2130	
Shale & Lime	2130	2305	
Lime	2305	2645	
Shale & Lime	2645	2880	
Lime	2880	3020	
Lime & Shale	3020	3290	
Lime	3290	3840	

RECEIVED
STATE COMMISSIONER OF GEOL. & MINES
FEB 3 1965
CONSERVATION DIVISION
WICHITA, KANSAS

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Maxine V. Head
Maxine V. Head

Subscribed and sworn to before me this 18th day of January, 1965.

Dean Hollan
Notary Public

My Commission Expires:
5-22-66