


15-065-00768-0001

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

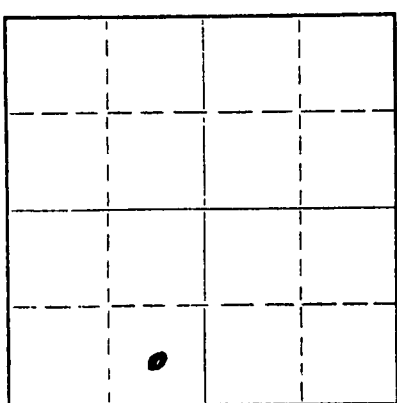

Locate well correctly on above  
Section Plat

Graham County, Sec. 12 Twp. 10S Rge. (E) 21 (W)  
Location as "NE/CNW/SW" or footage from lines SE SW SE  
Lease Owner. Leben Drilling, Inc.  
Lease Name. Beiker Well No. 3  
Office Address. P.O. Box 486 Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed December 14 1964  
Application for plugging filed September 15 1970  
Application for plugging approved September 16 1970  
Plugging commenced September 22 1970  
Plugging completed September 22 1970  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production December 1969  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Arbuckle Depth to top 3837 Bottom 3856 Total Depth of Well 3856 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE   | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
|           |         |      |    | 5 1/2" | 3839   | None       |
|           |         |      |    | 8 5/8" | 170    | None       |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

12 Sxs. 50/50 Poz.in 6% Gel from 3836' to 3653'  
27 Sxs. Gel from 3653' to 230'  
15 Sxs. 50/50 Pozmix 6% Gel from 230' to surface  
2200 psi Max. 1000 Psi standing pressure.

All work done with Sun Oilwell Cementing pump truck


RECEIVED  
STATE CORPORATION COMMISSION  
SEP 25 1970  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Leben Drilling, Inc.  
Address P.O. Box 486 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.  
A. J. Nelson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A. J. Nelson  
P.O. Box 486 Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN to before me this 23rd day of September 23, 1970



My Commission expires November 13, 1973

Helen L. Lindenmuth  
Notary Public.