

15-065-19207-0004

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Graham County, Sec. 12 Twp. 10 Rge. 21 K/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C WL SE SE

Lease Owner Bowman Oil Company

Lease Name Beiker Well No. 4

Office Address 101 Petroleum Codell, Ks 67630

Character of Well (Completed as Oil, Gas or Dry Hole)

Oil

Date Well completed 1/20 1986

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 12-15-83 19

Plugging completed 12-15-83 19

Reason for abandonment of well or producing formation

Oil depleted

If a producing well is abandoned, date of last production


1-1-83 1983

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well DENNIS HANIEL

Producing formation Arbuckle Depth to top 3832 Bottom 3840 Total Depth of Well 3847

Show depth and thickness of all water, oil and gas formations.

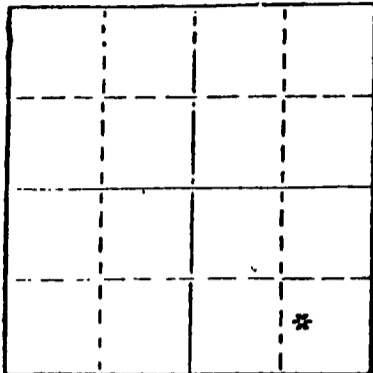

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil & Water	3832	3840	8"	189	None
				5"	3835	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Cement 50/50 por 8% gel  
5 1/2" pumped 25 sy cement with bulls -  
25 sy gel - 100 sy cement - pumped 125 sy  
cement I - max pressure 550# PSI - shut in 550# PSI

8 3/4" surface pipe, pumped 15 sy cement  
max pressure 250# PSI. Blow out surface pipe  
below ground level & circulated cement to  
surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services


STATE OF Kansas COUNTY OF Rooks, ss.  
Louis D. Bowman (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Louis D. Bowman  
Box 37 Codell, Ks 67630  
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of Dec, 1983

Vesta J. Russell  
Notary Public.

My commission expires July 17, 1984



STATE CORPORATION COMMISSION

JAN 12 1984 01-12-84

WICHITA, KANSAS