


DISTRICT CONSERVATION AGENT'S REPORT

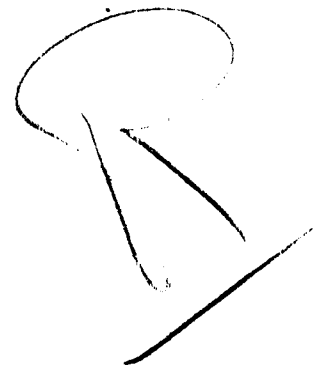

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 60-10

LOCATION SW NW SW

SEC. 2 TWP. 10 RGE. 21

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 7 Lease White

Operator Skelly Oil Co Address \_\_\_\_\_

Field \_\_\_\_\_ County Graham

Total Depth 3903 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 302' circulated with 150 sax cement.

Spotted 25 sax cement on bottom through drill pipe,  
filled hole with rotary mud, pushed wood plug to 290',  
displaced 25 sax cement through drill pipe, heavy mud to 65'  
set wood plug and filled hole to bottom cellar with cement.

**RECEIVED**  
STATE CORPORATION COMMISSION

FEB 13 1951  
2-13-1951  
CONSERVATION DIVISION  
Wichita, Kansas

**PLUGGING**  
FILE SEC 2 T 10 R 21  
BOOK PAGE 60 LINE 10

*[Signature]*  
District Conservation Agent

Date 2-6-51