


DISTRICT CONSERVATION AGENT'S REPORT

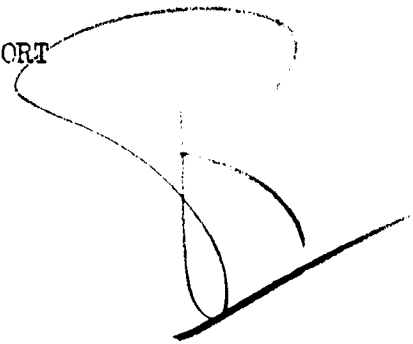

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NW SE NW

SEC. 2 TWP. 10 RGE. 21W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 5 Lease _____ Noah Box 784

Operator Phillips Pet Co Address Great Bend, Kans

Field _____ County Graham

Total Depth 3921 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 1782' circulated with cement.

~~Circulated hole with heavy rotary mud.
Displaced 40 sax cement on bottom through drill pipe
Pushed wood plug to 1775', displaced 10 sax cement
through drill pipe - Pushed Halliburton plug to 250',
displaced 80 sax cement through drill pipe - pushed
Halliburton plug to 40' and filled hole to bottom cellar
with cement.~~

RECEIVED
STATE CORPORATION COMMISSION
APR 30 1951
CONSERVATION DIVISION
District Conservation Agent

PLUGGING
FILE SEC 2 T 10 R 26
BOOK PAGE 78 LINE 36

Date 4-28-51