


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County. Sec. 9 Twp. 10S Rge. 21 E/W
Location as "NE/CNW/SW" or footage from lines
C NE SW SW

Lease Owner Petroleum, Inc.
Lease Name Grecian 'B' Well No. 1
Office Address 800 R.H. Garvey Bldg., Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
dry hole

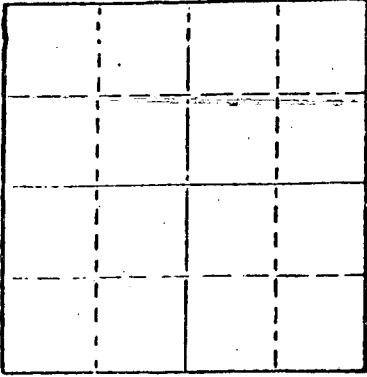

Locate well correctly on above
Section Plat

Date Well completed 6-27-81
Application for plugging filed 6-27-81
Application for plugging approved 6-27-81
Plugging commenced 6-27-81
Plugging completed 6-27-81

Reason for abandonment of well or producing formation
no commercial quantities of oil or gas encountered

If a producing well is abandoned, date of last production
-- 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3845

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface hole	shale	surf	285'	8-5/8	285	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 900', plug, 60 sx
Fluid to 300', plug, 30 sx
Fluid to 40', plug, 10 sx
Rat hole 5 sx

RECEIVED
STATE CORPORATION COMMISSION
7-8-1981
JUL - 8 1981

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor D N B DRILLING, INC.
515 R. H. Garvey Building
Wichita, Kansas 67202

STATE OF _____ COUNTY OF _____, ss.
(employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Paulsen
515 R.H. Garvey Bldg., Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of July, 19 81

Dorothy L. Schmidt
Dorothy L. Schmidt Notary Public.

My commission expires April 30, 1983

DOROTHY L. SCHMIDT
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Appt. Exp. April 30, 1983

DRILLER'S LOG

PETROLEUM, INC.
 Grecian 'B' No. 1
 C NE SW SW
 Sec. 9-10S-21W
 Graham Co., Ks.

Commenced: 6-18-81
 Completed: 6-27-81

Surface Casing: 277' 8-5/8" cmtd
 w/175 sx common, 2% gel, 3% cc

FORMATIONDEPTH

Surface Hole	0 - 285
Shale	285 - 350
Shale, Sand & Red Bed	350 - 1530
Shale	1530 - 1732
Anhydrite	1732 - 1755
Shale, Shells & Sand	1755 - 2180
Lime	2180 - 2520
Lime & Shale Streaks	2520 - 2853
Lime, Shale & Sand	2853 - 3105
Lime & Shale	3105 - 3570
Lime	3570 - 3776
Lime, Shale & Chert	3776 - 3802
Lime	3802 - 3845 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
 James L. Donelson

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 2nd day of July, 1981.

Dorothy L. Schmidt
 Dorothy L. Schmidt, Notary Public

RECEIVED
 STATE CORPORATION COMMISSION

7-8-1981
 11-8-1981

CONSERVATION DIVISION
 Wichita, Kansas

DOROTHY L. SCHMIDT
 STATE NOTARY PUBLIC
 Sedgwick County, Kansas
 My Appt. Exp. April 30, 1983