


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

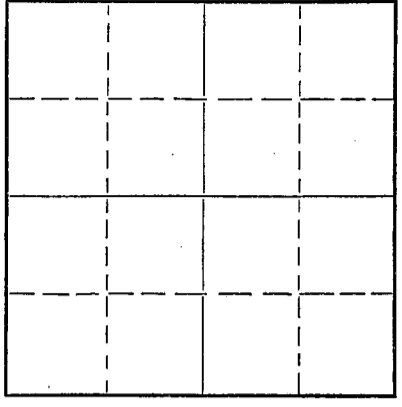

Locate well correctly on above
Section Flat

Graham County, Sec. 9 Twp. 10 Rge. (E) 21 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW SE $\frac{1}{4}$
Lease Owner Armer Drilling Company, Inc.
Lease Name Teall Well No. 1
Office Address 710 Petroleum Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed May 19 49
Application for plugging filed Feb. 5 19 52
Application for plugging approved Feb. 5 19 52
Plugging commenced Feb. 5 19 52
Plugging completed Feb. 9 19 52
Reason for abandonment of well or producing formation well depleted

If a producing well is abandoned, date of last production September 19 52
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Lansing Kansas City Depth to top 3483 Bottom Total Depth of Well 3826 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8	108	none
				5 $\frac{1}{2}$	3817	1994

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with crushed rock to 3520 ft., dumped 4 sacks cement with dump bailer, top of cement at 3490 ft. Set rock bridge at 200 ft., dumped 15 sacks cement at 200 ft. top of cement 150 ft. Filled hole with mud to 35 ft., set rock bridge, dumped 10 sacks cement for cap.

2-23-1952
LB 231052

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Miller Casing Pulling Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. C. Sponenberg (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. C. Sponenberg*
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of February, 1952

Walter
Notary Public.

My commission expires Sept. 17, 1955

PLUGGING
FILE SEC 9 T 10 R 21W
BOOK PAGE 140 LINE 39

OWNER: Armer Drilling Company, Inc.
CONTRACTOR: Armer Drilling Company, Inc.

FARM: Teall #1
LOCATION: NW 1/4 SE Sec. 9-10-21
Graham County, Kansas

DRILLING COMMENCED: 4/6/49
DRILLING COMPLETED: 4/22/49

CASING RECORD:
8-5/8" @ 108' w/75 sacks
5-1/2" @ 3817' w/100 sacks

ROTARY RIG NO. 1

ELEVATION: 2229'

(Figures Below Indicate Bottoms)

Shale	210	
Post Rock	250	
Shale	685	
Shale and Sand	930	
Shale and Shells; Sand and Iron	1090	
Sand and Shale	1450	
Sand and Shells	1550	
Red Rock and Shells	1725	
Lime	1765	
Shale and Shells	2025	
Lime and Shale	2210	
Lime	2265	
Lime and Shale	2578	
Lime	2645	
Lime and Shale	2725	
Shale and Shells	2775	
Shale and Lime	2997	
Shale	3010	
Lime	3140	
Lime and Shale	3215	
Limy Shale	3265	
Lime & Shale	3310	
Lime	3820	Rotary
	Total Depth	3820

TOPS:

Heebner	3446
Lansing-Kansas City	3483
Conglomerate	3775
Residual Simpson	3800
Arbuckle	3817

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

ARMER DRILLING COMPANY, INC.

BY: M. B. Armer
M. B. Armer

2-23-1952

STATE OF KANSAS)
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a notary public, in and for said County and State this 25th day of April, 1949.

Hazel Swarton
Notary Public

My commission expires Sept 17, 1951

7 10 210
149 39