


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above Section Plat

Graham County. Sec. 6 Twp. 10 Rge. 23W (E) (W)
Location as "NE/CNW%SW%" or footage from lines SE SE NW
Lease Owner D. G. Hansen
Lease Name Gano Well No. 1
Office Address Logan, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 1 19 57
Application for plugging filed September 1 19 57
Application for plugging approved September 1 19 57
Plugging commenced September 1 19 57
Plugging completed September 1 19 57
Reason for abandonment of well or producing formation Too low structurally

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? k Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4043 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	203'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 195'. Set plug. Put in 1/2 sack hulls, 1 sack cement. 15' rock, 20 sacks cement. Filled with heavy mud up to 40'. Set plug. Filled to top with 1/2 sack hulls & 10 sacks cement.

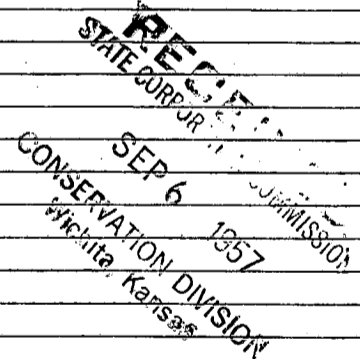

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C-G Drilling Co.
Address 107 Rule Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jay H. Galloway (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jay H. Galloway
107 Rule Bldg.
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of September, 19 57

Vicky Jacobs
Vicky Jacobs Notary Public.

My commission expires May 20, 1959

PLUGGING
FILE SEC 6 T. 10 R. 23W
BOOK PAGE 42 LINE 33

CONTRACTOR'S WELL LOG

OPERATOR D. G. Hansen WELL NAME Gano #1
 LOCATION SE SE NW 6-10-23W RIG NO. 1
 COUNTY Graham STATE Kansas
 COMMENCEMENT DATE August 23, 1957 COMPLETION DATE September 1, 1957

LOG OF WELL

Elevation 2455' rotary bushing.
 All measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	203	Surface Soil		
203	750	Shale		
750	1560	Shale-Sand		
1560	1815	Sand		
1815	2064	Red Bed		
2064	2102	Anhydrite		
2102	2165	Shale-Lime		
2165	2400	Lime-Shale		
2400	2605	Lime-Shale	0° - 2500	
2605	2775	Lime-Shale	0° - 2750	
2775	2900	Lime-Shale		
2900	3060	Lime-Shale	0° - 3000	
3060	3180	Lime-Shale		
3180	3295	Lime-Shale	0° - 3250	
3295	3430	Lime-Shale		
3430	3510	Lime-Shale	0° - 3500	
3510	3695	Lime-Shale		
3695	3790	Lime-Shale	0° - 3750	
3790	3845	Lime-Shale		DST 3820-3845
3845	3860	Lime-Shale		
3860	3950	Lime-Shale		DST 3917-3950
3950	3967	Lime-Shale		DST 3944-3967
3967	3985	Lime-Shale		DST 3962-3985
3985	4043	Lime-Shale		

CASING LEFT IN HOLE AFTER COMPLETION

Set 203' (10 jts.) 8-5/8" OD Surface Casing.

STATE OF KANSAS }
 COUNTY OF SEDGWICK } ss.

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By Jay H. Galloway
 Jay H. Galloway

Subscribed and sworn to before me this 5th day of September, 1957.

Vicky Jacobs
 Vicky Jacobs, Notary Public

My commission expires: May 20, 1959

PLUGGING
 FILE SEC 6 T 10 R 23W
 BOOK PAGE 42 33