


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

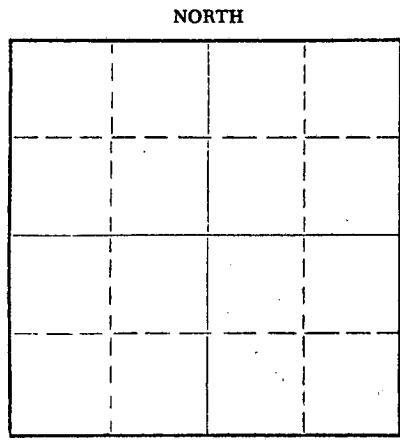

Locate well correctly on above
Section Plat

Graham County. Sec. 14 Twp. 10S Rge. 21 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW NW NW
Lease Owner Peel-Hardman Oil Operators
Lease Name Driscoll Well No. 5
Office Address R.R. #3, Box 144B, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Apr. 1, 1957
Application for plugging filed Apr. 1, 1957
Application for plugging approved Apr. 1, 1957
Plugging commenced Apr. 1, 1957
Plugging completed Apr. 1, 1957
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty,
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3890 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	168'	8 5/8"	168'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

From 3890' to 160' - heavy rotary mud
160' to 98' - wooden plug, 1/2 sack hulls, 20 sacks cement
98' to 35' - heavy rotary mud
35' to 6' - wooden plug, 1/2 sack hulls, 10 sacks cement
6' to surface- cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers, Inc.
Address P.O. Box 88, Hoisington, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Peel Brothers, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. PEEL BROTHERS, INC.

(Signature) BY: Al H. Smith
P.O. Box 88, Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of April, 1957

Ruth Brank
Notary Public.

My commission expires April 27, 1960

PLUGGING
FILE SEC. 14 T. 10 R. 21W
BOOK PAGE 4 LINE 40

RECEIVED
STATE CORPORATION COMMISSION
4-19-1957
APR 19 1957
CONSERVATION DIVISION
WICHITA, KANSAS

DRILLERS' LOG

Company: Peel-Hardman Oil Operators

SW NW NW
Sec. 14, Twp. 10S, Rge. 21W,

Farm Name: Driscoll Well No. 5

County: Graham,
Kansas

Total Depth: 3890'

Comm: 3/20/57 Comp: 4/1/57
Contractor: Peel Brothers, Inc.

Elevation:

Production: Dry

Casing: 8 5/8" @ 168' cem.

Figures below indicate bottoms of formations:

Clay	0 -	25
Rock shale		50
Sand		70
Shale and shells		168
Shale		740
Sand		1000
Shale and sand		1210
Shale		1225
Sand		1380
Shale and shells		1480
Red rock		1690
Red bed		1755
Anhydrite		1785
Shale		2280
Lime and shale		3500
Lime		3550
Lime and shale		3578
Lime		3775
Shale and lime		3819
Lime		3855
Lime and shale		3880
Lime		3890
Total Depth		3890

This is to certify that the above information is to the best of our knowledge true and correct.

PEEL BROTHERS, INC.

BY: Al H. Smith

SUBSCRIBED AND SWORN to before me this 4th day of April, 1957

My commission expires: April 27, 1960

Rich Brunk
Notary Public



4-19-1957
APR 19 1957
CONSERVATION DIVISION

PLUGGING
FILE SEC. 14 T. 10 R. 21W
BOOK PAGE 4 LINE 40