


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Graham County, Sec. 26 Twp. 10 Rge. -- (E) 21 (W)
Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner Rocket Schusterman Oil Account
Lease Name Barber A Well No. 3
Office Address 2700 First National Tower, Tulsa, OK 74103
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed January 12 19 56
Application for plugging filed February 28 19 83
Application for plugging approved March 15 19 83
Plugging commenced March 18 19 83
Plugging completed March 18 19 83
Reason for abandonment of well or producing formation Dry

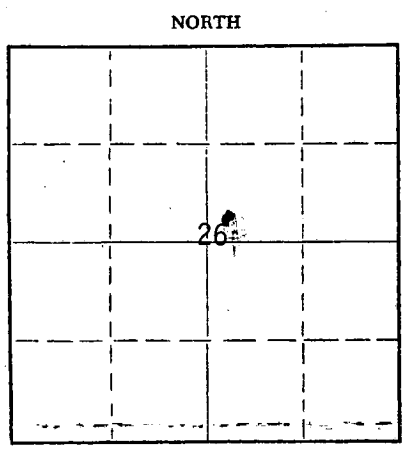

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production November 17 19 82
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Carl Goodrow
Producing formation Lansing Depth to top 3530 Bottom 3656 Total Depth of Well 3680 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Oil	3530	3656	5 1/2	3771	None
Arbuckle	Oil	3774	3778	None	--	--

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from Surface feet to 3000 feet for each plug set.

Pumped 2 sacks of hulls mixed in 10 sacks of cement, followed by 25 sacks of Gel and 110 sacks of cement down 5 1/2" casing. All cement 50-50 Poz mix with 6% Gel and 3% CaCl. Shut casing in at 1:45 p.m. Cement top stopped at 500 feet from surface, then dumped 2 yards of Redi-mix concrete and filled to surface. Well plugged and abandoned.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Samson Resources Co. (Oper. License #5463) for Rocket-Schusterman O. A.
Address 2700 First National Tower, Tulsa, OK 74103

STATE OF Oklahoma COUNTY OF Tulsa ss.
R. J. Davis, Employee of Owner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Davis
2700 First National Tower, Tulsa, OK 74103
(Address)



SUBSCRIBED AND SWORN TO before me this 24th day of March, 1983
Blonda Kay Yarbrough
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
3-28-1983
MAR 28 1983

CONSERVATION DIVISION
Wichita, Kansas

15-065-01787-00-00

DRILLERS' LOG

Company: Anderson-Prichard Oil Corporation

SW SW NE

Farm Name: Barber "A" Well No. 3

Sec. 26, Twp. 10S, Rge. 21W,

Total Depth: 3772'

County: Graham,
Kansas

Comm: 12-2-55 Comp: 12-14-55

Contractor: Glenn W. Peel

Elevation:

Casing: 8 5/8" 214' cem.
5 1/2" 3771' cem.

Production:

Figures below indicate bottoms of formations:

Surface clay	0 -	50
Sand and shale		75
Sand		110
Shale		750
Shale and shells		1641
Anhydrite		1690
Shale and shells		1780
Shale and lime streaks		2045
Shale and lime		2455
Sime		2690
Lime and shale		2810
Lime		2910
Lime and shale streaks		3045
Lime and shale		3150
Lime		3730
Conglomerate		3772
Total Depth		3772

This is to certify that the above information is to the best of our knowledge, true and correct.

GLENN W. PEEL

BY: *Glenn W. Peel*

SUBSCRIBED AND SWORN to before me this 15th day of December, 1955.

My commission expires: June 4, 1959

Marion M. Herbert

RECEIVED
STATE CORPORATION COMMISSION
4-22-1983
APR 22 1983

CONSERVATION DIVISION
Wichita, Kansas