


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Graham County, Sec. 26 Twp. 10 Rge. 21 (E) W (W)

NORTH

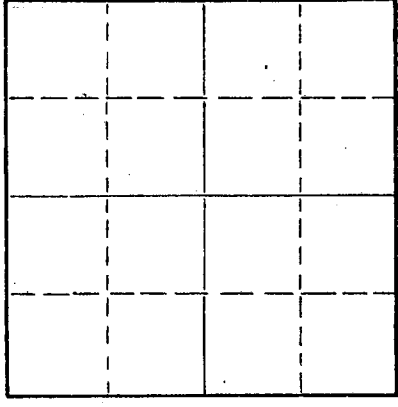

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines. SE SW NW  
Lease Owner Trans Era Petroleum, Inc.  
Lease Name Holzhuier Well No. 3  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed 2/27/54 19\_\_\_\_  
Application for plugging filed 2/25/54 19\_\_\_\_  
Application for plugging approved 2/25/54 19\_\_\_\_  
Plugging commenced 2/26/54 19\_\_\_\_  
Plugging completed 2/26/54 19\_\_\_\_  
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3811 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	205	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

PLUGGING RECORD

Layed down drill pipe, plugged hole. Set bottom plug at 190' with 1/2 sack of hulls and 15 sacks of cement. Top plug set at 40' with 1/2 sack of hulls and 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. R. Michaelis  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of March, 1954

My commission expires 1-30-57

Magie Cooper  
Notary Public.



**PLUGGING**  
FILE SEC 26 T 10 R 21  
BOOK PAGE 16 LINE 34

RECEIVED  
STATE CORPORATION COMMISSION  
3-4-1954  
CONSERVATION DIVISION  
Wichita, Kansas

Trans Era Petroleum, Inc.  
Holzhuer #3

SE SW NW 26-10-21  
Graham County, Ks.

Total Depth: 3811'  
Comm. 2/13/54  
Comp. 2/27/54

Casing

Cement

8 5/8" Set @ 205'

140 sacks Portland

Formation	Depth
Surface soil-clay	40
Sand-shale-shells	205
Shale-shells	460
Shale	710
Sand	825
Sand-shale	947
Shale-shells	1090
Sand	1370
Red bed	1607
Anhydrite	1655
Shale-shells	2135
Shale-lime	3415
Lime	3435
Lime-shale	3508
Lime	3649
Lime-shale	3786
Arbuckle	3811'

STATE OF KANSAS )  
                          ) ss  
RUSSELL COUNTY )


I hereby certify that the above information is true and correct to the best of my knowledge.

-----  
*Cora Betz*  
-----

Subscribed and sworn to before me this 2nd day of March, 1954.

-----  
*Margie Cooper*  
-----  
Notary Public

My commission expires: 1-30-57.



34-1954