


15-195-20719-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Trego County. Sec. 7 Twp. 12S Rge. 22 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
990' FSL 1600' FWL of NW/4
Lease Owner Moble C. Hoover
Lease Name D. C. Newcomer Well No. 2
Office Address NBC Building, Suite 302, El Dorado, Ark.
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

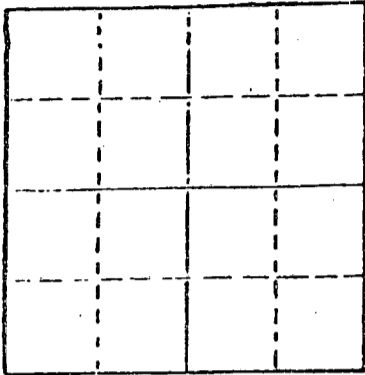

Locate well correctly on above
Section Plat

Date Well completed 10-21 1980
Application for plugging filed 10-21 1980
Application for plugging approved 10-21 1980
Plugging commenced 10-21 1980
Plugging completed 10-21 1980
Reason for abandonment of well or producing formation _____
No commercial quantity of oil or gas available
If a producing well is abandoned, date of last production _____
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3915'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

T.D. 3915'

Set 1st plug @ 800' with 60 sx.
2nd plug @ 270' with 30 sx.
3rd plug @ 40' solid bridge with 10 sx.
Rathole with 5 sx., 50/50 posmix, 6% gel.
Plug was down @ 3:15 a.m. 10-21-80.

11-02-1980
1980
WICHITA, KANSAS
DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of November, 19 80

Jeanette Metheny
Jeanette A. Metheny Notary Public.

My commission expires 08-18-84



15-195-20719-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	Moble C. Hoover
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	D. C. NEWCOMER #2
LOCATION:	990' FSL 1600' FWL of NW/4 Sec. 7-12S-22W, Trego County, KS
SPUD DATE:	10-14-80
COMPLETION DATE:	10-21-80

0	1755	Sand & Shale
1755	3915	Shale & Lime
	3915	Rotary Total Depth

Spud the hole @ 4:30 p.m. 10-14-80. Drilled 288' of a 12-1/4" hole. Ran 7 joints of 8-5/8" 20# casing (tally 278.11') Set @ 284.61'. Cemented with 185 sx. of common, 2% gel, 3% c.c. Plug was down @ 10-14-80.

T.D. 3915'. Set 1st plug @ 800' with 60 sx., 2nd plug @ 270' with 30 sx., 3rd plug @ 40' solid bridge with 10 sx. Rathole with 5 sx., 50/50 posmix, 6% gel. Plug was down @ 3:15 a.m. 10-21-80.

SAMPLE TOPS:

Anhydrite	1800'
B/Anhydrite	1860'

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

RECEIVED
STATE OF KANSAS COMMISSION
11-02-1980
NOV 2 1980

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the D. C. NEWCOMER #2, 990' FSL 1600' FWL of NW/4, Section 7-12S-22W, Trego County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
Jack L. Partridge, Asst. Sec.-Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 19th day of November, 1980.

Jeanette A. Metheny
Jeanette A. Metheny, Notary Public

