


15-195-20419-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Trego County, Sec. 7 Twp. 12S Rge. 22 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 990' SL &
990' EL, NE/4
Lease Owner Moble C. Hoover
Lease Name VAN EMON Well No. 1
Office Address 302 NBC Building, El Dorado, Arkansas 71730
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

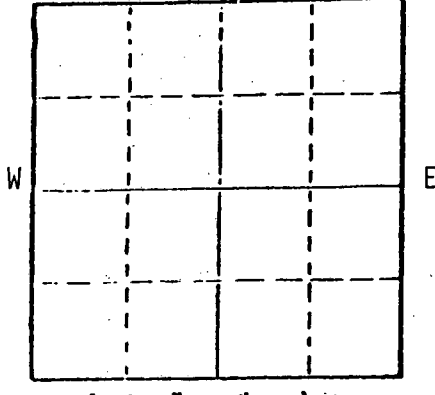

Date Well completed May 18, 1977
Application for plugging filed (verbally) May 18, 1977
Application for plugging approved (verbally) May 18, 1977
Plugging commenced May 18, 1977
Plugging completed May 18, 1977
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 1st plug at 840' with 70 sx.
2nd plug at 240' with 20 sx.
3rd plug at 40' with 10 sx.

Plug was down at 9:00 p.m., 5-18-77

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack K. Wharton, Geologist (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack K. Wharton

801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of May, 1977

Kathy S. Goert
Notary Public,

My commission expires

Kathy S. Goert
STATE CORPORATION COMMISSION



JUN 06 1977
06-06-1977
CONSERVATION DIVISION
Wichita, Kansas

CONTRACTOR'S WELL LOG

15-195-20419-00-00

OPERATOR: Moble C. Hoover
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: VAN EMON #1
 LOCATION: 990' SL & 990' EL, NE/4 Sec. 7-12S-22W, Trego County, Kansas
 SPUD DATE: 5-11-77
 COMPLETION DATE: 5-18-77

0	200	Clay & sane
200	259	Shale
259	1075	Shale & shells
1075	1810	Shale & sand
1810	1856	Anhydrite
1856	2228	Shale & sand
2228	3106	Shale & lime
3106	3310	Lime & shale
3310	3455	Lime
3455	3601	Lime & shale
3601	3905	Lime
	3905	Rotary Total Depth

Spud hole at 7:45 p.m. 5-11-77. Drilled 259' of 12 1/4" hole. Ran 6 jts. of 8-5/8" surface casing. Set at 258.55' K.B. Cemented with 190 sx. common cement, 3% CaCl, 2% gel. Plug was down at 1:00 a.m. 5-12-77. Cement did circulate.

T.D. 3905'. Set 1st plug at 840' with 70 sx., 2nd plug at 240' with 20 sx., 3rd plug at 40' with 10 sx. Cemented with 50/50 posmix, 6% gel. Plug was down at 9:00 p.m. 5-18-77. State Plugger - Leo Massey.

SAMPLE TOPS:

Anhydrite 1810' (+577)
 B/Anhydrite 1856' (+531)

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

Jack K. Wharton, Geologist of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the VAN EMON #1, 990' SL & 990' EL, NE/4 Section 7-12S-22W, Trego County, Kansas.

ABERCROMBIE DRILLING, INC.

By Jack K. Wharton
 Jack K. Wharton, Geologist

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 27th day of May, 1977.

Kathy S. Goertz
 Kathy S. Goertz, Notary Public
 RECEIVED
 STATE CORPORATION COMMISSION



JUN 06 1977
 06-06-1977
 CONSERVATION DIVISION
 Wichita, Kansas