


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 25 Twp. 10S Rge. 21 ~~22X~~ (W)
Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner Herman Geo. Kaiser
Lease Name White Well No. 5
Office Address 909 Palace Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 21, 19 61
Application for plugging filed October 21, 19 61
Application for plugging approved October 21, 19 61
Plugging commenced October 21, 19 61
Plugging completed October 21, 19 61
Reason for abandonment of well or producing formation Dry Hole

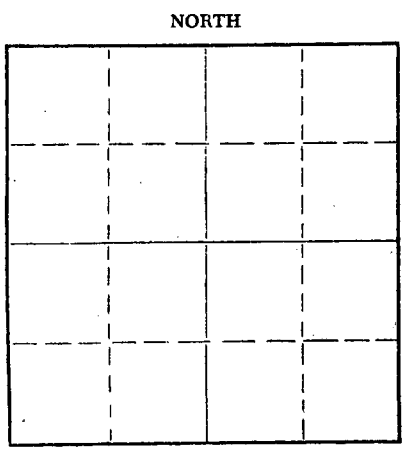

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,743 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	204'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 3,743 feet T. D. to 550 feet. Set plug and cemented with 20 sacks cement. Filled hole with heavy rotary mud to 190 feet. Set plug and cemented with 20 sacks cement. Filled hole with heavy rotary mud to 40 feet. Set plug and cemented with 10 sacks cement, filling hole to bottom of cellar.

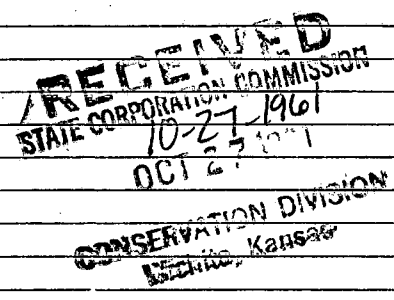


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor H-30, Inc.
Address 709 Petroleum Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick,
Priscilla M. Ismert (employee of owner, operator or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Priscilla M. Ismert
709 Petroleum Building, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of October, 19 61
Geraldine Hays
Geraldine Hays
Notary Public.



15-065-02532-00-00


KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Herman Geo. Kaiser, Oil Producer
FARM White NO. 5

SEC. 25 T. 10S R. 21W
LOC. SE NW SE

TOTAL DEPTH 3,743'
COMM. 10-11-61 COMP. 10-21-61
SHOT OR TREATED
CONTRACTOR H-30, Inc.
ISSUED

COUNTY Graham
KANSAS



CASING
20 10
15 8 5/8" cem. w/150 sx.
12 6
13 5

ELEVATION 2128 GR
2130 DF
2133 KB
PRODUCTION D&A

FIGURES INDICATE BOTTOM OF FORMATIONS

Surface Clay 30
Shale and Shells 85
Sand 95
Shale 204
Shale and Shells 745
Sand 830
Shale and Shells 1030
Sand 1295
Shale and Shells 1584
Anhydrite 1620
Shale 1920
Shale and Shells 2170
Lime and Shale 2825
Shale and Lime 3020
Lime and Shale 3400
K. C. Lime 3443
Lime 3535
K. C. Lime 3566
Lime 3630
Lime and Shale 3720
Arbuckle 3743
R. T. D. 3743

RECEIVED
STATE CORPORATION COMMISSION
10-27-1961
OCT 27 1961
CONSERVATION DIVISION
Wichita, Kansas

Sample Tops

Anhydrite Top 1584 / 549
Anhydrite Base 1620 / 513
Heebner 3369 -1236
Toronto 3395 -1262
Lansing-Kans. City 3409 -1276
Base-Kans. City 3634 -1501
Cherty Conglomerate 3686 -1553
Arbuckle 3720 -1587
R. T. D. 3743 -1610

I hereby certify that the above is a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Priscilla M. Ismert
Priscilla M. Ismert

STATE OF KANSAS)
SS:)
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, in and for said County and State this 26th day of October, 1961.

Geraldine Hays
Geraldine Hays, Notary Public

My Commission Expires:
December 3, 1964.

