


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

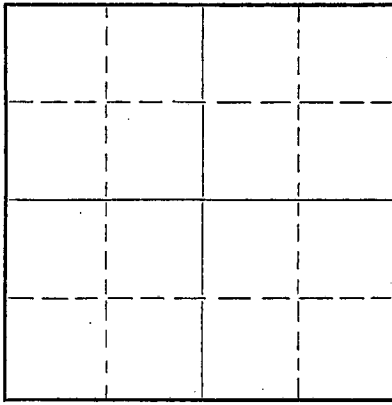

Locate well correctly on above
Section Plat

Graham County, Sec. 28 Twp. 10 Rge. 23 (E) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines D.S./2 NW NE
Lease Owner W. E. Wickizer
Lease Name Wickizer Well No. A3
Office Address MaKeeney, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 8-7 19 54
Application for plugging filed Phoned Mr. Petty 8-14 19 57
Application for plugging approved He gave instructions 8-14 19 57
Plugging commenced 8-15 19 57
Plugging completed 8-20 19 57
Reason for abandonment of well or producing formation lack of production

If a producing well is abandoned, date of last production 8-1 19 57
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Petty
Producing formation Kansas City Depth to top Bottom Total Depth of Well 3875' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
						2705' 5 1/2"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug at 3600', put in 1 bbl. sand, 5 sax cement, filled up with botary mud to 200', set plug, filled up with dirt to 35' after using 20 more sax of cement, then filled from 35' to top of well with more cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to W. E. Wickizer
Address MaKeeney, Kansas

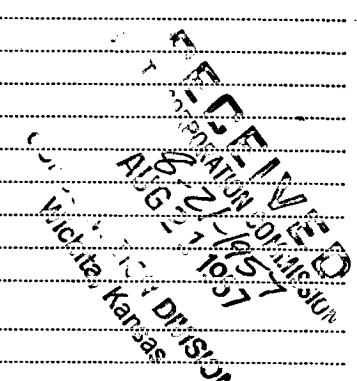

STATE OF Kansas, COUNTY OF Trego, ss.
W. E. Wickizer (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *W. E. Wickizer*
MaKeeney, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 20th day of August, 19 57.

My commission expires 7-12-60
James M. Fowler Notary Public.

PLUGGING
FILE SEC 28 T.10 R.23W
BOOK PAGE 39 LINE 7

GOLDEN CAT DRILLING and SERVICING COMPANY

Office Phone 379

Residence Phone 350

P. O. Box 611

To State Corporation Commission
800 Bitting Bldg.
Wichita, Kansas

Well Wickizer 13 (C S 1/2 NW NE) Sec. 28 Tw. 10 R. 23 Co. Graham

Commenced: 7-22-54

Completed: 8-7-54

TD: 3875'

Set 210' 8 5/8" surface pipe

0	to	210	Clay and sand
210		690	Shale and shells
690		1340	Shale and sand
1340		1903	Shale and shells
1903		1955	Anhydrite
1955		2070	Shale and shells
2070		2395	Shale and shells
2395		2530	Shale and lime
2530		2680	Sand, shale and shells
2680		2900	Shale and lime
2900		3255	Shale and lime
3255		3400	Lime and shale
3400		3610	Lime and shale
3610		3788	Lime
3788		3835	Lime and shale
3835		3846	Lime
3846		3875	Lime
3875TD			(Oil)

RECEIVED
STAT. CORPORATION COMMISSION
8-24-1957
AUG 24 1957
DIVISION

PLUGGING
FILE SEC 28 T 10 R 234
BOOK PAGE 39 LINE 7