

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 22 Twp. 10 Rge. 23W (E) (W)

Location as "NE/CNWxSWx" or footage from lines C NW NE

Lease Owner DONALD C. SLAWSON

Lease Name Geist 'A' Well No. 1

Office Address 408 One Twenty Building - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 7-23-65

Application for plugging filed 7-23-65

Application for plugging approved 7-23-65


Plugging commenced 7-23-65

Plugging completed 7-23-65

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

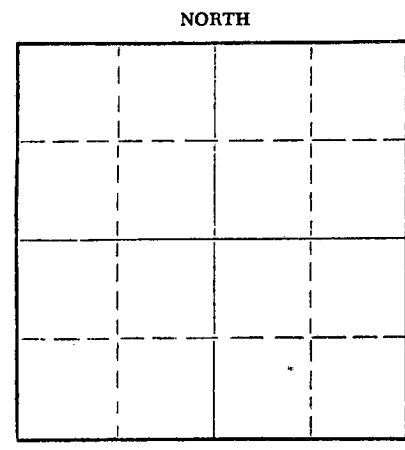

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker - Victoria, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3890 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 550', set plug, 20 sx cement

Mud to 240', set plug, 20 sx cement

Mud to 40', set plug, 1/2 sx hulls, 10 sx cement

2 sacks of cement in the rat hole

RECEIVED
STATE CORPORATION COMMISSION

AUG 10 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Slawson Drilling Company, Inc.
Address 408 One Twenty Building - Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

DONALD C. SLAWSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

408 One Twenty Building - Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of August, 1965

[Handwritten Signature]

Ella Priess

Notary Public.

My commission expires August 25, 1968



WELL LOG

Company: DONALD C. SLAWSON
 408 One Twenty Building
 Wichita, Kansas 67202

Farm: Geist 'A' #1
 C NW NE, Section 22-10-23W
 Graham County, Kansas

Total Depth: 3890' Elev. 2361 K.B.

Commenced: July 14, 1965
 Completed: July 23, 1965

Contractor: Slawson Drilling Company, Inc.

Casing: 8 5/8" @299' with 225 sacks of cement

0-85	Sand & Clay
85-299	Shale
299-1125	Shale & Shells
1125-1905	Shale & Lime
1905-1945	Anhydrite
1945-1995	Shale
1995-2060	Shale & Shells
2060-2345	Lime & Shale
2345-2575	Shale & Lime
2575-2740	Shale & Shells
2740-3395	Lime & Shale
3395-3500	Lime
3500-3573	Lime & Shale
3573-3616	Shale & Lime
3616-3636	Heebner
3636-3661	Toronto
3661-3746	K. C. Lime
3746-3784	Lime
3784-3890	K. C. Lime
3890	Total Depth

RECEIVED
STATE CORPORATION COMMISSION

AUG 10 1965

CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I, Donald C. Slawson, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Geist 'A' #1 well.

[Signature]
DONALD C. SLAWSON

Subscribed and sworn to before me this 9th day of August, 1965.

[Signature]
Ella Priess, Notary Public



My Commission Expires:
August 25, 1968