

15-065-02103-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

GRAHAM County, Sec. 6 Twp. 10S Rge. 24 XXXXXX (W)

Location as "NE/CNW/SW" or footage from lines: C SE NE  
Lease Owner: EMPIRE DRILLING COMPANY  
Lease Name: DENIO Well No. 1  
Office Address: 650 FOURTH NATIONAL BANK BLDG, WICHITA, KANSAS  
Character of Well (completed as Oil, Gas or Dry Hole): DRY HOLE  
Date well completed: June 18 1962  
Application for plugging filed: June 18 1962  
Application for plugging approved: June 18 1962  
Plugging commenced: June 18 1962  
Plugging completed: June 18 1962  
Reason for abandonment of well or producing formation: DRY HOLE



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production: 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well: ELDON PETTY  
Producing formation: \_\_\_\_\_ Depth to top: \_\_\_\_\_ Bottom: \_\_\_\_\_ Total Depth of Well: 4000 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Sand & Shale	0	164	8 5/8"	151'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug set at 540' with 20 sacks cements  
Plug set at 150' with 20 sacks cement  
Plug set at 35' with 10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION

JUN 26 1962

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor: EMPIRE DRILLING COMPANY  
Address: 650 FOURTH NATIONAL BANK BLDG, WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Dan J. Kornfeld (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Dan J. Kornfeld*  
650 FOURTH NATIONAL BANK BLDG., WICHITA, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of June, 1962

*Lucille H. Harr*  
Lucille H. Harr Notary Public.

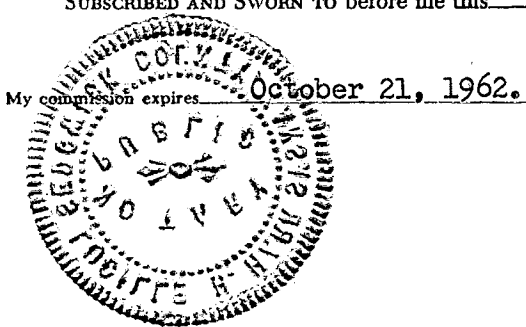

15-065-02103-0000

LOG

COMPANY: Empire Drilling Company  
 CONTRACTOR: Empire Drilling Company  
 FARM: Denio #1  
 LOCATION: C SE NE Section 6-10S-24W, Graham County, Kansas  
 COMMENCED: June 10, 1962 ELEVATION: 2523 KB  
 COMPLETED: June 18, 1962 POTENTIAL: D & A.

\*\*\*\*\*

0	to	164	Surface- Sand & Shale
164	to	1500	Shale & Shells
1500	to	1560	Shale-Sand
1560	to	1620	Sand
1620	to	1665	Sand & Shale
1665	to	1730	Shale
1730	to	1950	Sand
1950	to	2177	Shale & Shells
2177	to	2214	Anhydrite
2214	to	2435	Shale & Shells
2435	to	2615	Shale
2615	to	3241	Lime & Shale
3241	to	3335	Lime
3335	to	3865	Lime & Shale
3865	to	3970	Broken Lime
3970	to	4000	Broken Lime
4000			RTD

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 JUN 26 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

SET: 151# of 8 5/8" with 100 sacks cements.

SAMPLE TOPS:

Anhydrite	2177	+346
Heebner	3815	-1292
Toronto	3839	-1316
Lansing Kansas City	3854	-1331
Rotary Total Depth	4000	

\*\*\*\*\*

CERTIFICATION

I, Dan J. Kornfeld, do hereby certify that the above and foregoing is a true and correct copy of the log on the Denio #1, C SE NE Section 6-10S-24W, Graham County, Kansas, as reflected by the files of Empire Drilling Company.

*Dan J. Kornfeld*  
 Dan J. Kornfeld

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 25th day of June, 1962.

*Lucille H. Harr*  
 Lucille H. Harr, Notary Public

