

15-065-03132-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 6 Twp. 10 Rge. 24 W

Location as "NE/CNW%SW%" or footage from lines C - NE - SE

Lease Owner Empire Drilling Co.

Lease Name Reidel Well No. E-1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed May 20, 1962 19

Application for plugging filed December 5, 1962 19

Application for plugging approved December 5, 1962 19


Plugging commenced Dec. 5 19 82

Plugging completed Dec. 10 19 82

Reason for abandonment of well or producing formation Lack of production

If a producing well is abandoned, date of last production October 27, 1962 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

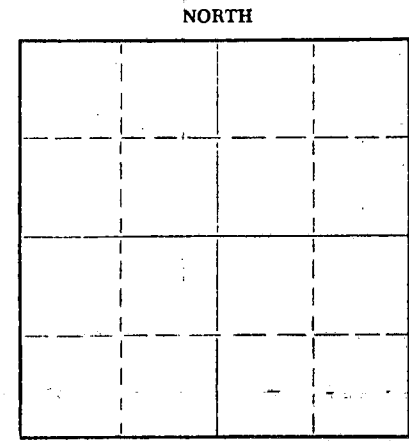

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Petty

Producing formation Lansing-Kansas City Depth to top 3979' Bottom 3985 Total Depth of Well 4049 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface shale	0	193	8 5/8"	178'	-0-
				5 1/2"	4049'	2092'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 4049 feet to surface feet for each plug set.

Pipe perf. at 3979, sanded up to 3970' dump 5 sacks on bottom. pulled pipe up to 550' circ. with mud, pump 20 sacks of cement to 550' pulled pipe to 200' pump 20 sacks of cement to 200', pulled pipe out dump 10 sacks of cement on top. Plugging completed.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 20 1962

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Barnes & sons Pipe pulling Co.  
Address 1216 N. Lincoln Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Dan J. Kornfeld (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature] 650 Fourth National Bank Bldg., Wichita 2, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of December, 1962

[Signature] Lucille H. Harr Notary Public.

My commission expires October 21, 1966



LOG

COMPANY: Empire Drilling Company  
 CONTRACTOR: Empire Drilling Company  
 FARM: Riedel E #1  
 LOCATION: C NE SE Section 6-10S-24W, Graham County, Kansas  
 COMMENCED: May 8, 1962  
 COMPLETED: May 20, 1962  
 ELEVATION: 2526 KB  
 POTENTIAL:

0	to	193	Surface Hole
193	to	920	Shale
920	to	1670	Shale-Shells-Sand
1670	to	2164	Shale & Sand
2164	to	2203	Anhydrite
2203	to	2600	Shale & Shells
2600	to	2723	Shale-Lime
2723	to	2855	Shale-Shells
2855	to	3230	Shale & Lime
3230	to	3305	Lime
3305	to	3835	Lime-Shale
3835	to	3878	Lime
3878	to	3890	Shale-Lime
3890	to	4050	Lime
4050			RTD

SET: 178' of 8 5/8" with 75 sacks cement.  
 4049' of 5 1/2" with 100 sacks cement.

ELECTRIC LOG TOPS:

Heebner	3806	-1280
Toronto	3829	-1303
Lansing Kansas City	3844	-1318
Zone 2	3871	-1345
Zone 2 A	3883	-1357
Zone 4	3920	-1394
Zone 5	3933	-1407
Zone 6	3978	-1452
Zone 6 A	4001	-1475
Zone 7	4019	-1493
Zone 8	4038	-1512
Schlumberger Log TD	4050	


DEC 20 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas

CERTIFICATION

I, Dan J. Kornfeld, do hereby certify that the above and foregoing is a true and correct copy of the log on the Riedel E #1, C NE SE Section 6-10S-24W, Graham County, Kansas, as reflected by the files of Empire Drilling Company.

*Dan J. Kornfeld*  
 Dan J. Kornfeld

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 28th day of May, 1962.



*Lucille H. Harr*  
 Lucille H. Harr, Notary Public

My commission expires October 21, 1962.