


RQ

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County, Sec. 4 Twp. 10S Rge. 24W (E) (W)
Location as "NE/CNW/SW" or footage from lines C SW SW
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Nickelson "C" Well No. 1
Office Address 780 Fourth National Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 27, 19 61
Application for plugging filed May 27, 19 61
Application for plugging approved May 27, 19 61
Plugging commenced May 27, 19 61
Plugging completed May 27, 19 61
Reason for abandonment of well or producing formation No commercial quantities of oil found.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

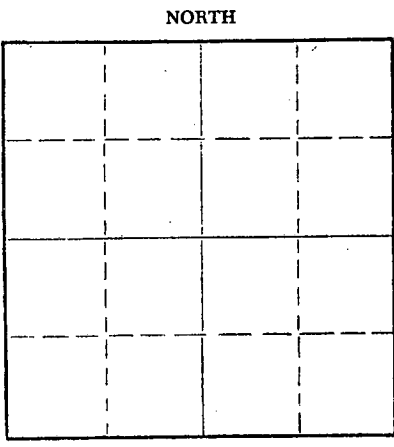

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Leiker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4078 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	192'	Not pulled

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set first plug at 550' with 20 sacks of cement; Set second plug at 185' with 15 sacks of cement; Set top plug at 40' with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
7-24-1961
JUL 24 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Imperial Oil of Kansas, Inc.
Address 780 Fourth National Bldg., Wichita 2, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
William A. Sladek (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) By: William A. Sladek IMPERIAL OIL OF KANSAS, INC.
Prod-Geol.
780 Fourth National Bldg., Wichita 2, Ks.
(Address)



SUBSCRIBED AND SWORN to before me this 21st day of July, 19 61
Bette J. Behymer
Bette J. Behymer Notary Public.

DRILLER'S LOG

Imperial Oil Company
780 Fourth National Building
Wichita 2, Kansas

Nickelson "C" No. 1
C SW SW Sec. 4-10S-24W
Graham County, Kansas

Total Depth: 4075

Elevation: 2504 K.B.
Production: Dry

Commenced: 5-17-61 Completed: 5-27-61

Contractor: Imperial Oil of Kansas, Inc.
Wichita 2, Kansas

Casing Record: Set 8-5/8" surface pipe at 192' with 150 sacks cement.

Figures indicate bottom of formations:

TOPS

Surface Clay & Sand	192'	Anhydrite	2153 (/ 351)
Shale, Shells & Sand	880'	Heebner	3800 (-1296)
Shald & Sand	1565'	Toronto	3824 (-1320)
Dakota Sand	1585'	Lansing	3838 (-1334)
Shale & Sand	1680'	B/Kansas City	4067 (-1563)
Dakota Sand	1900'	Total Depth	4075 (-1571)
Shale & Shells	2153'		
Anhydrite	2188'		
Shale & Shells	2410'		
Shale & Lime	3742'		
Lime	4075'		
Rotary Total Depth	4075'		

We hereby certify this to be a correct and accurate log of the above described well, as shown on the daily drilling reports.

RECEIVED
STATE CORPORATION COMMISSION

7-24-1961
JUL 24 1961

CONSERVATION DIVISION
Wichita, Kansas

IMPERIAL OIL COMPANY

By Raymond L. Bacon
Raymond L. Bacon

Subscribed and sworn to before me this 6th day of June, 1961.

My commission expires:

July 27, 1964

Bette J. Behymer
Bette J. Behymer, Notary Public