


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

GRAHAM CO, KANSAS County. Sec. 9 Twp. 10S Rge. 24W (E) (W)
Location as "NE/CNW/SW" or footage from lines C SE SE
Lease Owner K & E & PET INC.
Lease Name HOBBS Well No. 1
Office Address 719 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed May 21st, 1959 19
Application for plugging filed May 21st, 1959 19
Application for plugging approved May 21st, 1959 19
Plugging commenced May 21st, 1959 19
Plugging completed May 21st, 1959 19
Reason for abandonment of well or producing formation _____

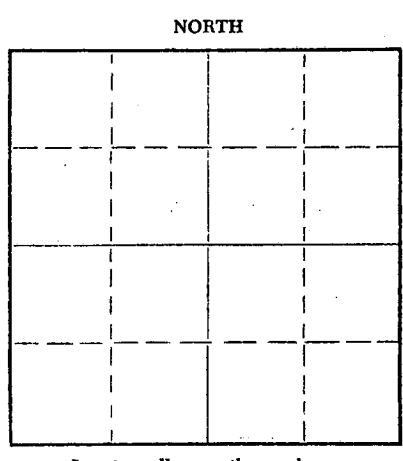

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4095 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	218'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 600' set plug with 20 sx cement thru drill pipe. Filled with heavy mud to 215' set plug with 20 sx cement thru drill pipe. Filled with heavy mud to 40' set solid plug with 10 sx cement to base of cellar. Job complete 5-21-59


RECEIVED
STATE CORPORATION COMMISSION
5-28-1959
MAY 28 1959
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor K & E DRILLING, INC.
Address 719 Union Center, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott
Dale Silcott of K & E DRILLING, INC.
719 Union Center, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26 day of May, 19 59
My commission expires August 11th, 1962.
Patricia M. Edwards, Notary Public.



PLUGGING
FILE SEC 181 15 R 184
BOOK PAGE 40 LINE 30

DRILLER'S WELL LOG

OPERATOR: **K & E DRILLING, INC.**
 719 Union Center
 Wichita 2, Kansas

WELL NAME: **#1 HOBBS**
 LOCATION: **C SE SE, Sec. 9-10S-24W**
GRAHAM COUNTY, KANSAS

CONTRACTOR: **K & E DRILLING, INC.**
 719 UNION CENTER BLDG.
 WICHITA, KANSAS

COMMENCED: **May 16th, 1959**

CASING RECORD: **8-5/8" @ 218' (150 sx)**

COMPLETED: **May 21st, 1959**

ELEVATION: **2488' KB**

ROTARY TOTAL DEPTH: **4095'**

PRODUCTION: **D & A**

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Surface Soil & Clay	35
Sand & Shale	85
Shale & Shells	1180
Shale & Sand	1680
Sand	1885
Red Bed	2000
Shale & Red Bed	2125
Anhydrite	2170
Shale & Shells	2475
Shale & Lime	2780
Lime & Shale	3195
Lime	3490
Lime & Shale	3685
Lime	4075
Lime & Shale	4095
R.T.D.	4095

5-28-1959

CERTIFICATION

State of KANSAS }
 County of SEDGWICK } ss:

I, Dale Silcott, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Dale Silcott
 Dale Silcott

Subscribed and sworn to before me this 26th day of May, 1959

Patricia M. Edwards, Notary Public.

My Commission expires: August 11th, 1962.

PLUGGING
 FILE SEC 18T.15 R.15W
 BOOK PAGE 40 LINE 30

