

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

#4

API NUMBER 15-065-22,448 -0000

LEASE NAME Gano

WELL NUMBER 2

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

805 Ft. from S Section Line

1280  
360 2<sup>1/2</sup> KCC  
Ft. from E Section Line

SEC. 30 TWP. 10S RGE. 24 N/E/1/4 (W)

COUNTY Graham

LEASE OPERATOR Ron's Oil Operations

ADDRESS P. O. Box 112, Penokee, KS 67659

PHONE# (913)-674-2409 OPERATORS LICENSE NO. 6861

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 4/10/88

Plugging Commenced 4/10/88

Plugging Completed 4/10/88

The plugging proposal was approved on 4-10-88 (date)

by Dale Balthazor (KCC District Agent's Name).

Is ACO-1 filled? No If not, is well log attached? Yes

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 4100'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8-5/8"	260'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.  
Mud laden fluid 4100'-2170' 10 sks cement @ 40'  
25 sks cement @ 2170' 15 sks in Rathole  
100 sks cement @ 1230'  
40 sks cement @ 300'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, Kansas 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]  
Kyle B. Branum

RECEIVED (Address) P. O. Box 506, Russell, KS 67665-0506

STATE CORPORATION COMMISSION  
SUBSCRIBED AND SWORN TO before me this 13th day of April, 19 88

4-14-88  
APR 14 1988 Glenda R. Tiffin  
Glenda R. Tiffin, Notary Public

My Commission Expires: February 6, 1992.

GLEND A. TIFFIN  
NOTARY PUBLIC  
STATE OF KANSAS  
MY APPT. EXPIRES 2-6-92

CONSERVATION DIVISION  
Wichita, Kansas

Form CP-4  
Revised 07-87

15-065-22448-0000

EMPHASIS OIL OPERATIONS

P. O. BOX 506  
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Ron's Oil Operations, Inc.  
P. O. Box 112  
Penokee, Kansas 67659

CONTRACTOR: Emphasis Oil Operations  
Box 506  
Russell, KS 67665

LEASE: Gano

WELL #2

LOCATION: NE SE SE  
Section 30-10S-24W  
Graham County, Kansas

LOGGERS TOTAL DEPTH: 4100'

ROTARY TOTAL DEPTH: 4100'

COMMENCED: 4/1/88

CASING: 8-5/8" @ 260' w/160 sks cement

ELEVATION: 2481' K.B.

COMPLETED: 4/10/88

STATUS: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Sand & Post Rock	85'	Anhydrite	2178'
Blue Shale	1119'	Shale & Lime Stks.	3793'
Dakota Sand	1200'	Top of Heebner	3794'
Red Bed	1700'	Top of Toronto	3815'
Cedar Hills Sand	1895'	Top of Lansing-Kansas City	3830'
Red Bed	2144'	Lime (R.T.D.)	4100'

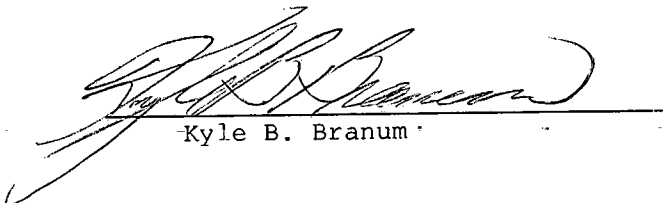
STATE OF KANSAS )  
                          ) ss  
COUNTY OF RUSSELL)

RECEIVED  
STATE CORPORATION COMMISSION

APR 14 1988


CONSERVATION DIVISION  
Wichita, Kansas

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

  
\_\_\_\_\_  
Kyle B. Branum

Subscribed and sworn to before me on April 13, 1988.

My commission expires: February 6, 1992.

  
\_\_\_\_\_  
Glenda R. Tiffin, Notary Public

