


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

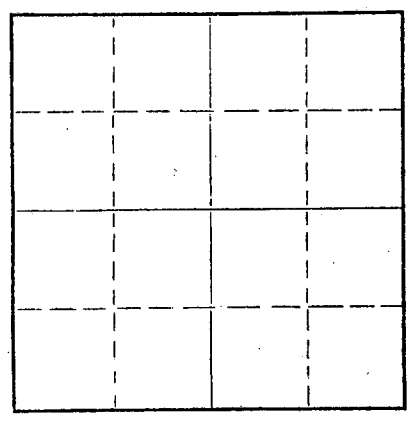

Locate well correctly on above
Section Plat

Graham County. Sec. 2 Twp. 10 Rge. (E) 25 (W)
Location as "NE/CNW%SW%" or footage from lines C SW SE
Lease Owner Sunray Mid-Continent Oil Company
Lease Name P. A. Billinger Well No. 1
Office Address P.O. Box 729, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-21 19 61
Application for plugging filed 7-21 19 61
Application for plugging approved 7-21 19 61
Plugging commenced 7-21 19 61
Plugging completed 7-21 19 61
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 4050 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	321'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud from 4050' to 295'
Set plug at 295' with 1/2 sack hulls and 25 sacks cement
Filled with mud to 40'. Set plug at 40' with 1/2 sack hulls and 10 sack cement.
Filled with mud to surface.

RECEIVED
STATE CORPORATION COMMISSION
8-11-1961
AUG 11 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Garvey Drilling Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. R. Nichols (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P. O. Box 729, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th. day of July 19 61
My commission expires December 24, 1964
[Signature] Notary Public.

15-065-0209Z-00-00

WELL LOG

COMPANY **SUNRAY MID-CONTINENT OIL COMPANY**

FARM **BILLINGER** NO. **1**

TOTAL DEPTH **4050'**

COMM. **July 10, 1961** COMP. **July 21, 1961**


CONTRACTOR **GARVEY DRILLING COMPANY**

CASING **8-5/8" @ 321.06' w/300 sax.**

SEC. **2** T. **10S** R. **25W**

LOC. **C-SW, SE**

COUNTY **GRAHAM CO., KANSAS**



ELEVATION **2514'DF**

PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

322	Surface soil & shale
340	Shale
1730	Shale & shells
1960	Sand
1975	Shale & shells
2183	Shale
2221	Anhydrite
2690	Shale
3000	Shale & lime
3105	Lime & shale
3523	Lime
3539	Lime & shale
4050	Lime
4050	T. D.

RECEIVED
 STATE CORPORATION COMMISSION
 8-11-1961
 AUG 11 1961
 CONSERVATION DIVISION
 Wichita, Kansas

State of KANSAS
 County of BARTON } ss

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY
 upon oath state the above and foregoing is a true and correct copy of the log of the #1 BILLINGER well.

Subscribed and sworn to before me this 7th day of August 1961

My Commission Expires: November 12, 1962

Verne A. Morris

Notary Public

 NOTARY PUBLIC