


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

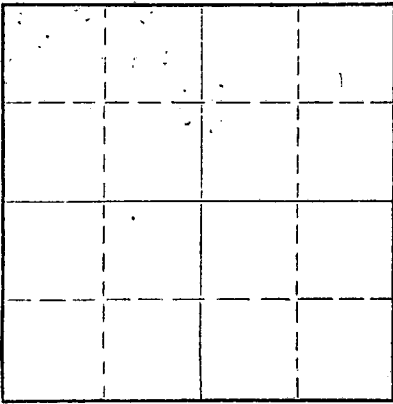

Locate well correctly on above
Section Plat

GRAHAM County. Sec. 15 Twp. 10S Rge. 24W (E) (W)
Location as "NE/CNW%SW%" or footage from lines NE NE SE
Lease Owner K & E DRILLING, INC.
Lease Name SPROUL Well No. 1
Office Address 719 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-14-57 19
Application for plugging filed 12-14-57 19
Application for plugging approved 12-14-57 19
Plugging commenced 12-14-57 19
Plugging completed 12-14-57 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4020' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	244'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 600'. Set Wood Plug with 20 sx cement thru drill pipe. Filled hole with heavy mud to 230'. Set Wood Plug with 15 sx cement thru drill pipe. Filled hole with heavy mud to 40' Set Plug with 1/2 sx hulls and 10 sx cement. Job complete 8:30 p.m. 12-14-57.


RECEIVED
STATE CORPORATION COMMISSION
JAN 9 1958
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor K & E DRILLING, INC.
Address 719 Union Center, Wichita 2, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott
Dale Silcott, of K & E DRILLING, INC.
719 Union Center, Wichita 2, Kansas
(Address)

Subscribed and sworn to before me this 6th day of January, 1958
11 August 1958.
Patricia M. Edwards, Notary Public.



PLUGGING
FILE SEC. 15 T. 10 R. 24 W
BOOK PAGE 70 LINE 4

15-065-00986-0000

W E L L L O G

OPERATOR:	K & E DRILLING, INC. 719 Union Center Building Wichita, Kansas	FARM NAME:	#1 SPROUL
CONTRACTOR:	K & E DRILLING, INC. 719 Union Center Wichita, Kansas	LOCATION:	NE NE SE Section 15-10S-24W Graham Co, Kansas
CASING:	8-5/8" @ 244' (175 sx)	COMMENCED:	12-7-57
R.T.D	4020'	COMPLETED:	12-14-57
		ELEVATION:	2432' KB
		PRODUCTION:	D & A

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Cellar	8
Soil & Clay	50
Blue Shale	245
Shale	1035
Sand & Pyrite	1080
Shale & Shells	1595
Sand	1800
Shale & Shells	1840
Red Bed & Shale	2050
Anhydrite	2090
Shale & Shells	2480
Shale & Lime	2855
Lime	2975
Shale & Lime	3180
Lime	3295
Lime & Shale	3685
Lime	4010
Lime & Shale	4020
R.T.D.	4020

RECEIVED
STATE CORPORATION COMMISSION
JAN 9 1956
CONSERVATION DIVISION
KANSAS

CERTIFICATION

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:


I, Dale Silcott, upon my oath, hereby state that the above and foregoing is a true and correct copy of the Driller's Log of the K & E #1 SPROUL well.

Dale Silcott
Dale Silcott, of K & E DRILLING, INC.

Subscribed and sworn to before me this 6th day of January, 1958.

Patricia M. Edwards
Patricia M. Edwards, Notary Public

My commission expires: 11 August 1958.



PLUGGING
SEC 15 T 10 R 24W
BOOK PAGE 70 LINE 9