

15-065-02650-0000

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 25 Twp. 10 Rge. 24 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines SW-NE-NE

Lease Owner Glickman Oil Co.

Lease Name Billings Well No. 1

Office Address Wichita, Kansas, P. O. Box 3104

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed April 26 1962

Application for plugging filed November 5 1962

Application for plugging approved November 5 1962


Plugging commenced Dec. 11 1962

Plugging completed Dec. 15 1962

Reason for abandonment of well or producing formation non-commercial

If a-producing well is abandoned, date of last production October 31 1962

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

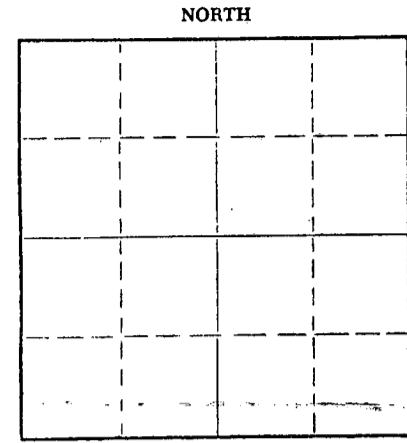

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Petty, Eldon Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3980 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	183'	None
				5-1/2"	3979'	3288.40

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3980 feet to surface \_\_\_\_\_ feet for each plug set.

Sanded up to 10' above pret. dump 5 sacks of cement on sand.  
Pulled pipe up to 600' circ. with mud, pump 20 sacks of cement to 600'.  
Pulled pipe to 200' pump 20 sacks of cement to 200', pulled pipe from hole put 10 sacks of cement on top.  
Well completed.

RECEIVED  
STATE CORPORATION COMMISSION

JAN 2 1963

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Barnes & Sons Pipe Pulling Co. (If additional description is necessary, use BACK of this sheet)  
Address Russell, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Milton Glickman (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Milton Glickman Partner  
P. O. Box 3104, Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 27th day of December, 19 62

November 19, 1963  
Lorella Schauf Notary Public.



15-065-02650-0000

GLICKMAN OIL COMPANY

P. O. Box 3108

Wichita, Kansas

DRILLERS WELL LOG

Company: Glickman Oil Company

Location: SW NE NE

Sec. 25-10S-24W

Farm: Billings

Well No. 1

Graham County, Kansas

Commenced: 4-17-62

Elevation: 2387 RB

Completed: 4-26-62

Total Depth: 3980

Casing: 8-5/8" @ 183' w/140 sxs.

Production:

5-1/2" @ 3979 w/125 sxs.

Geologist - Al Stude

-----  
Figures Indicate Bottom of Formations

50	Shale & Clay		
70	Shady Shale		
1385	Shale		
1490	Sand		
2002	Shale & Red Bed	Anhydrite	1994
2038	Anhydrite	Heebner	3698
2450	Shale	Toronto	3720
2525	Shale & Lime	Lansing	3732
2850	Lime & Shale	Base Kansas City	3960
2960	Shale & Lime		
3190	Lime & Shale		
3445	Shale & Lime		
3730	Lime & Shale		
3950	Lime		
3980	Lime & Shale		
3980	RTD		

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 28 1962  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss:

I, Milton Glickman, of the Glickman Oil Company, upon oath state that the above and foregoing is a true and correct copy of the log of the Billings #1

Milton Glickman  
Milton Glickman Partner

Subscribed and sworn to before me this 17th day of May, 1962.

Lorella Schauf  
LORELLA SCHAUF Notary Public

My Commission Expires:

My commission expires Nov. 19, 1963

