


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

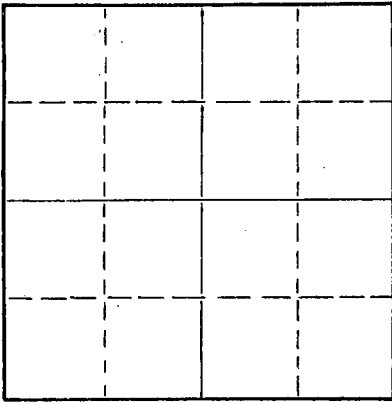

Locate well correctly on above
Section Plat

Graham County. Sec. 26 Twp. 10 Rge. 21 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE NW NW
Lease Owner Trans Era Petroleum, Inc.
Lease Name Holzhauser Well No. 5
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9/21/54 19
Application for plugging filed 9/19/54 19
Application for plugging approved 9/19/54 19
Plugging commenced 9/20/54 19
Plugging completed 9/21/54 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3777 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGING RECORD

Layed down 120 joints of drill pipe. Filled hole with heavy mud to 200', set first plug at 190' with one-half sack of hulls and 20 sacks of cement mixed and run through drill pipe. Filled hole to 40', push plug down, put in one-half sack of hulls and ten sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Trans Era Petroleum, Inc.
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
H. R. Michaelis, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *H. R. Michaelis*
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of September, 1954

My commission expires 1-30-57.

Margie Cooper
Notary Public.

9-30-1954



PLUGGING
FILE SEC 26 T 10 R 210
PAGE 66 LINE 35

CONSERVATION DIVISION
STATE OF KANSAS

Trans Era Petroleum, Inc.
Holzhauer #5

SE NW NW 26-10-21
Graham County, Ks.

Total Depth: 3777'
Comm. 9/9/54
Comp. 9/21/54

Casing

8 5/8" Set @ 200'

Cement

145 sacks of Victor

FORMATION	DEPTH
Surface soil-clay	60
Sand-shale	105
Shale-shells	360
Sand	470
Shale	770
Shale-sand	1100
Sand	1350
Shale-red bed	1617
Anhydrite	1658
Shale-shells	2103
Lime-shale	3463
Lime	3633
Lime-shale	3760
Lime	3777'

STATE OF KANSAS }
 } ss
RUSSELL COUNTY }

I hereby certify that the above information is true and correct to the best of my knowledge.

Subscribed and sworn to before me this 29th day of September, 1954.

Conn. Bell

 RECEIVED
 STATE CORPORATE RECORDS
 9-30-1954

 MARGIE COOPER
 Notary Public

My commission expires: 1-30-57.



PLUGGING
 FILE NO. 26-10-214
 BOOK PAGE 66 LINE 35