


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

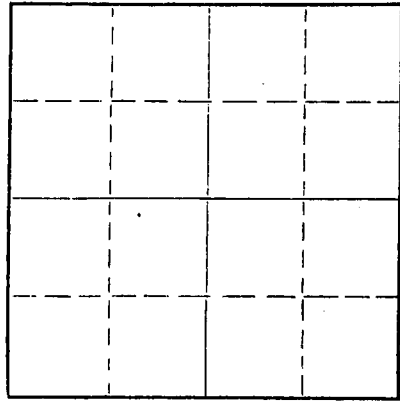

Locate well correctly on above
Section Plat

GRAHAM County. Sec. 2 Twp. 10S Rge. 22W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner K & E DRILLING, INC., et al
Lease Name BRASSFIELD 'B' Well No. 1
Office Address 719 Union Center Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-18-57 19
Application for plugging filed 6-18-57 19
Application for plugging approved 6-17-57 19
Plugging commenced 6-17-57 19
Plugging completed 6-17-57 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	h234	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with mud to 225' set wood plug & solid bridge with 1/2 sack hulls and 20 sacks cement.
Fill hole to 40' set wood plug & solid bridge with 1/2 sack hulls and 10 sx cement. Plugging Complete.

RECEIVED
CORPORATION COMMISSION
6-21-1957
JUN 21 1957
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor K & E DRILLING, INC.
Address 719 Union Center, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott
Dale Silcott of the K & E DRILLING, INC.
719 Union Center Bldg, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of June, 1957
My commission expires 11 August 1958.
Patricia M. Edwards Notary Public.

PLUGGING
FILE SEC. 2 T. 10 R. 22W
BOOK PAGE 21 LINE 40

WELL LOG

OPERATOR:	K & E DRILLING, INC., ET AL 719 Union Center Building Wichita 2, Kansas	FARM NAME:	#1 BRASSFIELD 'B'
CONTRACTOR:	K & E DRILLING, INC. 719 Union Center Building Wichita 2, Kansas	LOCATION:	SE NW SE Sec. 2-10S-22W Graham County Kansas
CASING:	8-5/8" @ 234' (150 sx.)	COMMENCED:	6-9-57
R.T.D.	3800'	COMPLETED:	6-18-57
		PRODUCTION:	D & A
		ELEVATION:	2326' KB

FORMATION RECORD

Depths shown indicate bottom of formations encountered

Mud and Clay	30
Clay & Shale	100
Shale	800
Sandy Shale	1060
Shale & Sand	1325
Sand	1540
Red Bed & Shale	1800
Anhydrite	1850
Shale & Shells	2480
Lime & Shale	2660
Lime & Shale	2920
Lime	3070
Lime & Shale	3360
Lime	3800
R.T.D.	3800

CERTIFICATION

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I, Dale Silcott of the K & E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the log of the #1 BRASSFIELD 'A' well.

Dale Silcott

 Dale Silcott

Subscribed and sworn to before me this 19th day of June, 1957.

Patricia M. Edwards

 Patricia M. Edwards, Notary Public

My commission expires: 11 August 1958.



EIVED
 DRATION COMMISSION
 6-21-1957
 JUN 21 1957
 DIVISION

PLUGGING
 FILE SEC 2 T 10 R 22W
 BOOK PAGE 21 LINE 40