


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

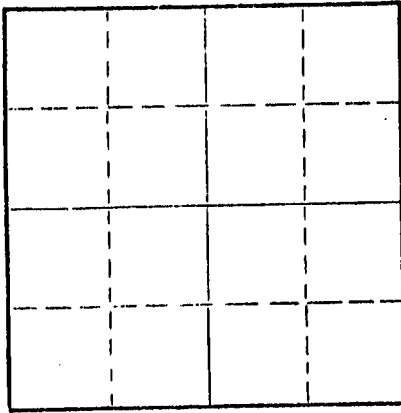

Locate well correctly on above
Section Plat

Graham County, Sec. 2 Twp. 10 Rge. 22 (E) (W)
Location as "NE/CNW/SW" or footage from lines S E N W N E
Lease Owner Spector Pipe & Supply, Inc.
Lease Name Brassfield Well No. 2
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 1-7-57 19
Application for plugging filed Feb. 21, 1968 19
Application for plugging approved Feb. 22, 1968 19
Plugging commenced 3/6 1968
Plugging completed 3/9 1968
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols
Producing formation Kansas City Depth to top 3780 Bottom 3801 ft Total Depth of Well 3810 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-----------|----------|------------|
| | | | | 8 5/8" OD | 242 ft. | None |
| | | | | 4 1/2" OD | 3801 ft. | 005.20 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged Back to 3500 with Sand, 3 Sacks cement.
Pumped 4 Sacks hulls, 35 sacks Mud, & 100 Sacks Cement, to Top.

RECEIVED
STATE CORPORATION COMMISSION
MAR 20 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling
Address Rt # 4 Great Bend, Kansas 67630

STATE OF Kansas, COUNTY OF Russell, ss.
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of March, 1968

My commission expires May 21, 1971
Wilma M. Lyndall Notary Public.

15-065-08045-00-00
WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


COPY

Company- K & E, BROWN & FORTIER
 Farm- Brassfield No. 2

SEC. 2 T. 10 R. 22W
 SE NW NE

Total Depth. 3810'
 Comm. 11-23-56 Comp. 1-7-57
 Shot or Treated.
 Contractor. K & E Drilg., Inc.
 Issued. 10-12-57

County Graham
 KANSAS



CASING:
 8 5/8" 242' w/150 sx cem.
 5 1/2" 3801' w/100 sx cem.

Elevation. 2327' KB

Production. 302 BOPD

Figures Indicate Bottom of Formations.

| | |
|-------------------|------|
| surface soil-clay | 45 |
| sand-shale | 75 |
| shale | 242 |
| shale-shells | 860 |
| shale-sand | 1050 |
| shale | 1250 |
| sand | 1505 |
| shale | 1670 |
| red bed-shale | 1790 |
| Anhydrite | 1828 |
| shale-shells | 1995 |
| lime-shale | 3521 |
| Heebner | 3526 |
| shale-lime | 3585 |
| lime | 3810 |
| Total Depth | |

| | |
|---------------|------|
| TORS: Scout | |
| Anhydrite | 1805 |
| Heebner | 3315 |
| Toronto | 3537 |
| Lansing | 3551 |
| B/Kansas City | 3780 |

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 26 1968
 CONSERVATION DIVISION
 Wichita, Kansas