


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

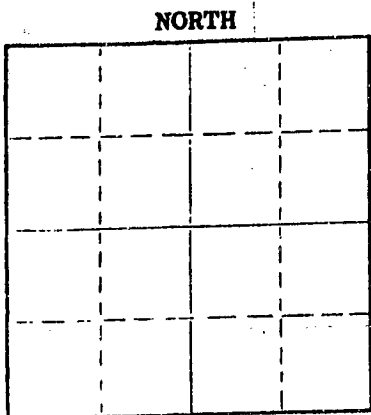

Graham County, Sec. 33 Twp. 10 Rge. 23 (E) (W)  
Location as "NE/CNWKSW" or footage from lines NW SE SE  
Lease Owner Cities Service Oil Co.  
Lease Name Diebolt #3 Well No.  
Office Address Hill City, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 7/20 1954  
Application for plugging filed 4/2 1975  
Application for plugging approved 4/3 1975  
Plugging commenced 4/9/75 19  
Plugging completed 5/12/75 19  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor  
Producing formation: Depth to top Bottom Total Depth of Well 3806  
3775 RTKCC  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	225	none
				5 1/2"	3775	242

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3761', ran sand to 3610' and ran 5 sacks cement.  
Shot pipe at 1010', 903', 810', 689', 593', 500', 334', 232',  
pulled 8 joints. Pumped 5 sacks hulls, 65 sacks cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)  
KNIGHT CASING PULLING CO., INC.

Name of Plugging Contractor CHASE, KANSAS  
Address

STATE OF KANSAS COUNTY OF RICE  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS

Subscribed and sworn to before me this 20th day of May 1975

Margaret Melcher  
Notary Public.

My commission expires



RECEIVED  
06-04-75  
Conservation Division  
Wichita, Kansas

DRILLER'S LOG

Imperial Drilling Company, Inc.  
903 Union National Bank Building  
Wichita 2, Kansas

#3 Diebolt  
NW SE SE Sec. 33-10S-23W  
Graham County, Kansas

Total Depth: 3775'

Commenced: 6-23-54 Completed: 7-20-54

Elevation: 2342' R.B.

Contractor: Imperial Drilling Company, Inc.,  
Wichita, Kansas

Production: 207 B.O.P.D.

Casing Record: Set 225' of 8-5/8" Surface Pipe W/175 sacks,  
Set 3775' of 5-1/2" Casing W/125 sacks.

Figures indicate bottom of formations:

Surface-Clay and Sand	225'		
Blue Clay and Shale	630'		
Shale, Sand and Shells	1220'		<u>TOPS</u>
Sand and Shale	1320'	Anhydrite	1822' ( /520)
Dakota Sand	1540'	Heebner	3539' (-1197)
Shale and Shells	1822'	Lansing	3575' (-1233)
Anhydrite (hard)	1866'	Rotary Total Depth	3775' (-1433)
Red Bed, Shale and Shells	1920'		
Shale and Shells	2330'		
Shale and Lime	3537'		
Lime	3775'		
Total Depth	3775'		

RECEIVED  
STATE CORPORATION COMMISSION

APR 3 1956

CONSERVATION DIVISION  
WICHITA, KANSAS

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL DRILLING COMPANY, INC.

By: *Rowell J. Bacon*  
Vice-President

Subscribed and sworn to before me this 24th day of September, 1954.

My Commission Expires:

*Marilyn E. Fox*  
Notary Public

November 9, 1957