


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

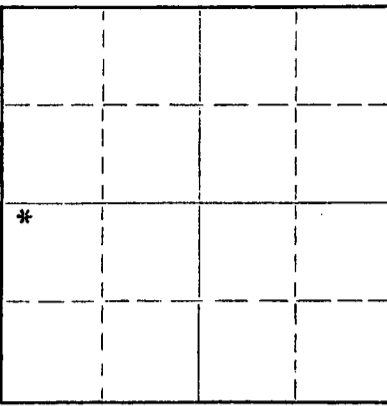

Locate well correctly on above
Section Plat

Graham County. Sec 15 Twp. 10S Rge. 22 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NE SE
Lease Owner Kaiser and Francis
Lease Name Andreen Well No. 1
Office Address Ellinwood, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced Oct. 15, 1957
Plugging completed Oct. 24, 1957
Reason for abandonment of well or producing formation Insufficient production

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	259'	none
				5 1/2	3800'	2806' .75

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug back with sand from 3770' to 3600' and dump 4 sx. cement from 3600' to 3568'. Pulled 5 1/2" to 1,000' and circulated 19 sx gel mud. Pulled to 700' and pumped in 20 sx. cement. ~~Pumped in~~ Pulled 5 1/2" to 240' and pumped in 20 sx. cement. Bailed off mud to 35' and set 5' rock bridge from 35' to 30'. Dumped 10 sx. cement from 30' to base cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.
W. J. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) W. J. Hall

SUBSCRIBED AND SWORN to before me this 29 day of October, 1957
Delmer L. Postroy (Address)
My commission expires 5/13/61 Notary Public.

PLUGGING
FILE SEC. 15 T. 10 R. 22
BOOK PAGE 52 LINE 23

11-1-1957

W E L L L O G

OPERATOR: KAISER-FRANCIS, et al
909 Palace Building
Tulsa, Oklahoma

FARM NAME: #1 ANDREEN

CONTRACTOR: K & E DRILLING, INC.
719 Union Center Building
Wichita 2, Kansas

LOCATION: NE NE SE
Sec. 15-10S-22W
Graham County
Kansas

CASING: 8-5/8" @ 259 (165 sx Posmix HA5)
5-1/2" @ 3799 (150 sx Com Cmt)

COMMENCED: 9-23-57
COMPLETED: 10-1-57

R.T.D 3800' RTD

PRODUCTION: unknown
ELEVATION: 2277' KB

FORMATION RECORD

Depths shown indicate bottom of formations encountered

Surface soil & Clay	40
Shale	258
Shale & Shells	704
Sand & Shale	790
Shale & Shells	1240
Sand	1500
Red Bed	1765
Anhydrite	1805
Shale & Shells	2220
Lime	2400
Lime & Shale	2970
Lime	3080
Shale & Lime	3220
Lime & Shale	3530
Lime	3735
Lime & Shale	3800

R.T.D. 3800

RECEIVED
STATE OF KANSAS
10-19-1957
OCT 19 1957

CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I, Dale Silcott of the K & E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the log of the #1 ANDREEN.

Dale Silcott
Dale Silcott,

Subscribed and sworn to before me this 10th day of October, 1957.

Patricia M. Edwards
Patricia M. Edwards, Notary Public



My commission expires: 11 August 1958.

PLUGGING
FILE SEC 15 T 10 R 22W
BOOK PAGE 52 LINE 23