


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County. Sec. 5 Twp. 10S Rge. 25 R/W
Location as "NE/CNW\SW\" or footage from lines
330' SNL 330' WEL NE NE SW
Lease Owner Beren Corporation
Lease Name Mike Well No. #1
Office Address 970 Fourth Financial Center Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

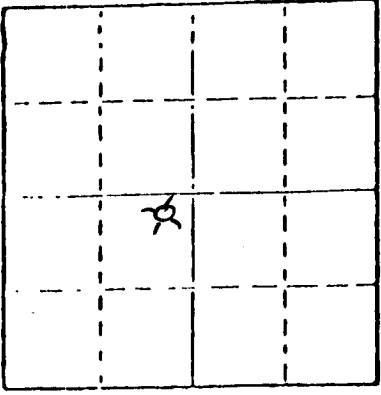

Locate well correctly on above
Service Plot

Date Well completed June 22 1980
Application for plugging filed June 22 1980
Application for plugging approved June 22 1980
Plugging commenced June 22, 7:30 A.M. 1980
Plugging completed June 22, 9:00 A.M. 1980
Reason for abandonment of well or producing formation
No Commercial Production
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gil Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 9115
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface casing	common	0	303.95'	8 5/8"	303.95'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plug #1 @ 900' with 70 sxs
Plug #2 @ 290' with 20 sxs
Plug #3 @ 40' with 1 sx Hulls & 10 sxs
5 sxs in rathole
50-50 poz 6% gel

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pioneer Drilling Company, Inc.
308 West Mill Plainville, Kansas 67663

X STATE OF Kansas COUNTY OF Sedgwick, ss.
Max S. Houston (employee of owner) or (owner or operator
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.


(Signature) Max S. Houston

SUBSCRIBED AND SWORN TO before me this 1st day of July, 19 80

(Address)

My commission expires November 4, 1980

Karen G. Berry
Notary Public.



15-065-21219-0000

WELL LOG

OPERATOR: Beren Corporation

WELL NAME: Mike #1 LOCATION: 330' SNL 330' WEL
NE NE SW 5-10S-25W

COUNTY: Graham STATE: Kansas

WELL COMMENCED: June 13, 1980 WELL COMPLETED: June 22, 1980

ELEVATION: 2574' G.R. TOTAL DEPTH: 4115'

PRODUCTION: D & A RIG NO: #2

CASING - 8-5/8": 303.95' of used 28# cemented with 200 sxs 60-40 poz 2% gel 3% cc
10jts cement circ plugdown @ 6:00 P.M.
5-1/2": none

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	305'			
305'	863'			
863'	1730'	sand and shale	2146' - 1 1/8 degrees	
1730'	2146'	shale and sand		
2146'	2208'	sand and shale		
2208'	2247'	Anhydrite		
2247'	2415'	sand and shale	2654' - 0 degrees	
2415'	2654'	sand and shale		
2654'	2860'	shale		
2860'	3055'	shale		
3055'	3194'	lime and shale		
3194'	3379'	shale and lime		
3379'	3515'	shale and lime		
3515'	3635'	lime and shale		
3635'	3761'	shale and lime	3855' - 1 degree	
3761'	3855'	shale and lime		
3855'	3876'	shale and lime		
3876'	3911'	shale and lime		
3911'	3952'	shale and lime		
3952'	3995'	shale and lime		
3995'	4034'	lime and shale		
4034'	4038'	lime and shale		
4038'	4080'	shale and lime and clay		
4080'	4115'			
4115'	RTD			

STATE OF KANSAS
COUNTY OF

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct

PIONEER DRILLING CO., INC.

By Roy L. Comen

30th day of June, 1980

Connie Jo Austin
- NOTARY PUBLIC

RECEIVED

STATE CORPORATION COMMISSION AND SWORN TO, BEFORE ME, THIS

JUL 1 1980

CONSERVATION DIVISION
Wichita, Kansas

