

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 5 Twp. 10S Rge. (E)25 (W)

Location as "NE/CNWxSWx" or footage from lines NE SE SW

Lease Owner Aspen Drilling Co.

Lease Name Pfeifer Well No. 1

Office Address P. O. Box 783, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 3-17-67 19

Application for plugging filed 3-21-67 19

Application for plugging approved 3-22-67 19

Plugging commenced 3-18-67 19

Plugging completed same 19

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
set at 209'				8 5/8"	201'	none


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 550', wood plug, 1/2 sack Hulls & 20 sacks cement.

Mud to 210', wood plug, 1/2 sack Hulls & 20 sacks cement.

Mud to 40', wood plug, 1/2 sack Hulls and 10 sacks cement.

2 sacks cement in rat-hole.

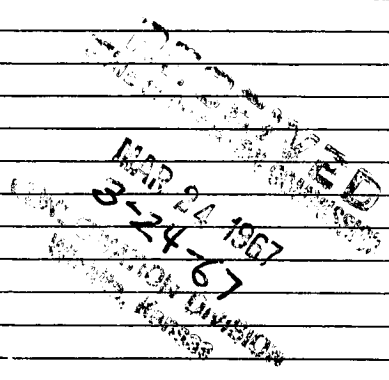

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Company tools
Address P. O. Box 783, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

William S. Schachle (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) William S. Schachle


P. O. Box 783, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 21st day of March, 1967

Theresa Hollman

Notary Public.

My commission expires April 18, 1968



D R I L L E R S L O G

COMPANY	Aspen Drilling Co.
CONTRACTOR	Aspen Drilling Co.
LEASE NAME	Pfeifer #1
LOCATION	NE SE SW Sec.5-T10S-R25W Graham County, Kansas
ELEVATION	Q578EDF 2571 Gr.
SURFACE CASING	5 jts.(201') 8 5/8"
COMMENCED	March 10, 1967
COMPLETED	March 17, 1967
ROTARY TOTAL DEPTH	4100'

<u>FORMATION</u>	<u>DEPTH</u>	
Clay	40	Spudded in 12¼" hole, 3-11-67
Shale & Shells	210	Ran 5 jts.(201') 8 5/8" set
Shale	1195	at 209'. Cemented with 140
Sand	1350	Sacks Sunset cement. Cement
Shale	1650	did circulate. Plug down
Shale-Red Bed	2195	7:15 PM 3-10-67
Anhydrite	2235	
Shale	2529	DST #1 3820-3842
Lime & Shale	2710	DST #2 3842-3870
Shale	3465	DST #3 4002-4030
Shale & Lime	3580	
Lime & Shale	3842	Ran electric log.
Lime	4100	
Total Depth	4100	Plugged and abandoned.

LOG TOPS

Heebner	3812 -1231
Toronto	3834 -1253
Lansing	3847 -1266
Base Kansas City	4087 -1506

RECEIVED
 STATE GEOLOGICAL COMMISSION
 MAR 24 1967
 INSPECTION DIVISION
 Topeka, Kansas

AFFIDAVIT

STATE OF KANSAS)
) ss:
 COUNTY OF BARTON)

The undersigned, being duly sworn on oath, states that the above statement and log are a true and correct record and log of the well drilled at the location above described.

William S. Schachle
 William S. Schachle

Subscribed and sworn to before me this 21st day of February, 1967.

Thomas J. Halloran
 Notary Public

My Commission Expires: April 18, 1968

