

15-065-00008-0000


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Graham County, Sec 5 Twp. 10 Rge. 25 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NW SW NE  
Lease Owner Kimbark Operating Co.  
Lease Name Vance Well No. #1  
Office Address Box 86 Plainville, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed Sept. 28, 1974 19  
Application for plugging approved 19  
Plugging commenced 11-22-74 19  
Plugging completed 11-29-74 19  
Reason for abandonment of well or producing formation

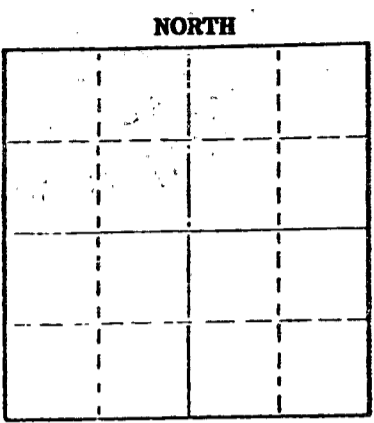

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 4130' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	4121'	1290.14'
				8 5/8"	202'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Made bottom hole plug back with sand to 3850'. Mixed and ran 4 sacks cement thru dump bailer.  
Squeezed hole with 5 sacks hulls and 11 sacks gel.  
110 cu. ft. cement from 1325' - 1000'  
19 sacks gel from 1000' - 240'  
30 cu. ft. cement from 240' - 165'  
3 sacks gel from 165' - 40'  
10 cu. ft. from 40' to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 3 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas  
(Address) 19 74



Subscribed and sworn to before me this 3 day of Dec. 19 74  
Sidney D. Miller  
Notary Public.