

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Cowley County, Sec. 21 Twp. 33 Rge. 4 E (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW 1/4 SW/4 NW/4

Lease Owner McNeish & Galapp, et al

Lease Name Collinson Well No. C-1

Office Address Winfield, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 2/13/53 19

Application for plugging filed 2/13/53 19

Application for plugging approved 2/13/53 19


Plugging commenced 2/13/53 19

Plugging completed 2/13/53 19

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

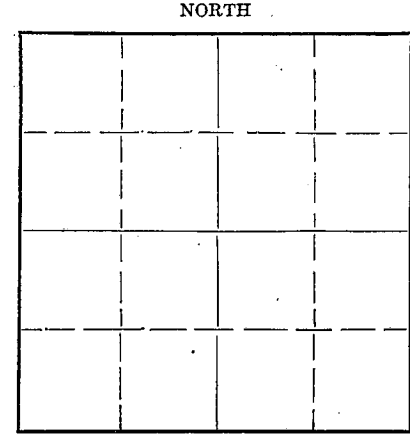

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well W. S. Lemaster

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with mud from 3192 to 650; cement with 50 sacks from 650 to 488 ft.; mud from 488 feet to 90 feet; cement from 90 ft. to 0 ft. Steel plate welded on.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to McNeish & Galapp  
Address 528 State Bank Bldg., Winfield, Kansas

STATE OF Kansas COUNTY OF Cowley, ss.

Ben Galapp (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ben Galapp  
Winfield, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 18th day of February, 19 53

My commission expires April 9, 1953

Grace Hill  
Notary Public.

PLUGGING  
FILE SEC 21 T 33 R 4 E  
BOOK PAGE 79 LINE 25

Company: McNeish & Gralapp  
Winfield, Kansas

Farm: Collinson C-1  
SWc NW<sup>1</sup>/<sub>4</sub> 21-33-4E  
Cowley County, Kans.

Contractor: Watson Drilling Company, Inc.  
Winfield, Kansas.

Casing Recprd: 8 5/8" 86' set with  
70 sacks cement  
DRY & PLUGGED

Comm: 1/30/53  
Comp: 2/13/53

clay & sand	0	50
lime & shale		65
lime		86
lime & shale		260
lime		300
lime & shale		680
shale		760
shale & shells		945
shale & lime		1220
lime & shale		1615
shale & hard sand		
streaks		1680
lime & shale		1850
shale & sand streaks		2155
sand		2175
shale		2250
sand		2277
shale		2383
shale & lime		2454
shale		2475
sand		2509
shale		2536
shale & sand		2609
shale		2648
lime		2953
sandy lime		2987
shale		3133
sandy shale		3140
shale		3150
<del>xxxxxxx</del> sand		3159
Diamond Core #1	3159-3173	
shale		3183
chat		3193

T. D. 3193 DRY & PLUGGED  
Mud from 3192-650

Plugged with cement 50 sacks 650 to 488  
Mud 488 to 90; 30 sacks cement 90 to top.  
Steel plate welded.

**PLUGGING**  
FILE SEC 21T-33R-4E  
BOOK PAGE 29 LINE 35