

150.87

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-22206-00-00
Spot: SENWSESE Sec/Twnshp/Rge: 19-19S-29W
800 feet from S Section Line, 830 feet from E Section Line
Lease Name: SUPPES Well #: 1-19
County: LANE Total Vertical Depth: 4642 feet

Operator License No.: 3842
Op Name: LARSON ENGINEERING, INC. DBA LAR
Address: 562 W STATE RD 4
OLMITZ, KS 67564

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	260		WITH 175 SX CMT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/20/2009 3:45 PM
Plug Co. License No.: 5822 Plug Co. Name: VAL ENERGY, INC.
Proposal Rcvd. from: RANDY MARTIN Company: VAL ENERGY, INC. Phone: (316) 263-6688

Proposed Plugging Method: 1ST PLUG AT 2220' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER WitnessType: NONE
Date/Time Plugging Completed: 12/20/2009 5:45 PM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

1ST PLUG AT 2220' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Perfs:

RECEIVED
DEC 31 2009
KCC WICHITA

INVOICED
DATE 2/25/10
INV. NO. 2010060877

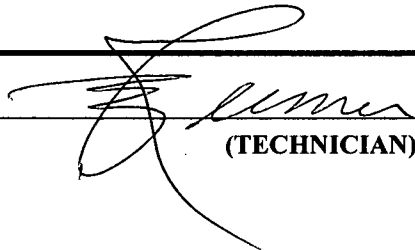
Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

RECEIVED
DEC 22 2009
KCC DODGE CITY

Signed _____


(TECHNICIAN)

Form CP 2009 