

\$161.46

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-023-21218-00-00
Spot: SE Sec/Twnshp/Rge: 26-5S-37W
1390 feet from S Section Line, 1360 feet from E Section Line
Lease Name: FISHER "F" Well #: 1-26
County: CHEYENNE Total Vertical Depth: 4968 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 8080 E CENTRAL STE 300
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	260		250 SX

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 11/14/2009 3:00 AM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: KEITH Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: Ordered 220 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE
Date/Time Plugging Completed: 11/14/2009 4:30 AM KCC Agent: DAVID WANN

Actual Plugging Report:
1st. Plug at 2960' w/25 sxs.
2nd. Plug at 2060' w/100 sxs.
3rd. Plug at 310' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 30 sxs.
Mousehole with 15 sxs.

Perfs:
INVOICED
DATE 2/26/10
INV. NO. 2010060823


RECEIVED
FEB 12 2010
KCC WICHITA

Remarks: QUALITY OIL WELL CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed _____

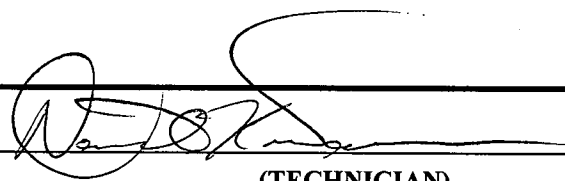

(TECHNICIAN)

CM

FEB 01 2010