


STATE OF KANSAS
SEVERED CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

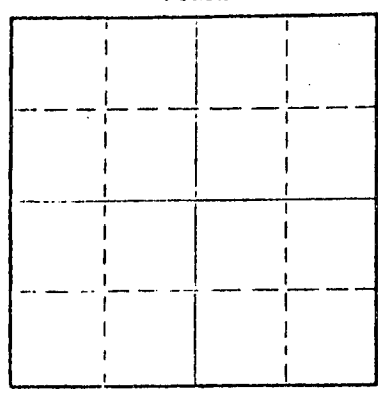

Locate well correctly on above
Section Plat

_____ Ellis _____ County. Sec. 14 Twp. 11 Rge. 18 (E) (W) x
Location as "NE/CNW&SW" or footage from lines. C of S/2 NW NE
Lease Owner Herman Geo. Kaiser
Lease Name Deane Well No. #4
Office Address Box 791 Hays, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 12-26-74 _____ 19____
Plugging completed _____ 12-30-74 _____ 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3481' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3478'	2322.64'
				8 5/8"	1158'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3450'. Mixed and ran 3 sacks cement thru dump bailer.
Mudded hole to 375' - set 25' rock bridge.
Filled hole with 5 yards ready-mix from 350' to base of cellar.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec
Box 364 Great Bend, Kansas
(Address)

Subscribed and Sworn to before me this 31 day of December, 1974



24 October 1976
My commission expires

Sidney D. Miller
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
JAN 2 1974
CONSERVATION DIVISION
Wichita, Kansas

B & R Drilling, Inc.
Deane #4

CS/2 NW NE 14-11-18W
Ellis County, Kansas

Total Depth: 3481'
Comm. 8/31/52
Comp. 9/16/52

RECEIVED	
DATE	SEP 24 1952
INDEX	ENCLOSURE
FILE	

Casing

Cement

13 3/8" Set @ 86'
4" Set @ 3480'

100 sacks Posmix
250 sacks Posmix

Formation

Surface soil-sand
 Sand-shale-shells
 Shale-shells
 Shale-sand-shells
 Shale-sand
 Shale-shells
 Shale-sand
 Red bed-shells
 Red bed
 Anhydrite
 Shale-shells
 Shale-lime
 Lime
 Lime-shale
 Lime
 K.C. Lime
 Lime

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 22 1974
 CONSERVATION DIVISION
 Wichita, Kansas

Depth

40
 87
 315
 615
 820
 850
 900
 1065
 1151
 1180
 1850
 2939
 2969
 3018
 3096
 3163
 3481'

STATE OF KANSAS)
) ss
 RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Car. Betz

Subscribed and sworn to before me this 22nd day of September, 1952.

[Signature]

Notary Public

My commission expires: 6-17-54.