


15-005-02144-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

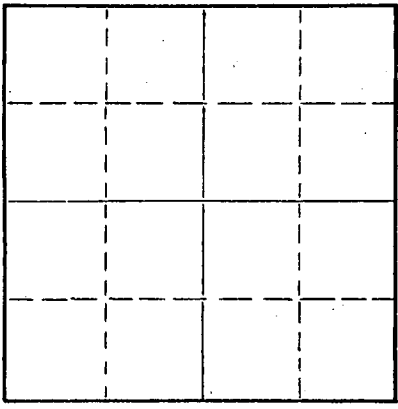

Locate well correctly on above
Section Plat

GRAHAM County. Sec. 18 Twp. 10 Rge. (E) 25 (W)

Location as "NE/CNWxSWx" or footage from lines SW NE SE
Lease Owner EMPIRE DRILLING CO., & N. C. R. A.
Lease Name KRUG "A" Well No. 3
Office Address 650 FOURTH NAT'L BANK BUILDING
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed MAY 31, 1958 19
Application for plugging filed MAY 31, 1958 19
Application for plugging approved MAY 31, 1958 19
Plugging commenced MAY 31, 1958 19
Plugging completed MAY 31, 1958 19
Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well A. D. FABRICIUS
Producing formation Depth to top Bottom Total Depth of Well 4010 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	SURFACE	0	164	8 5/8"	164	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

BOTTOM PLUG SET @ 600' WITH 25 SACKS CEMENT, PLUG SET @ 160' WITH 15 SACKS CEMENT, PLUG SET @ 40' WITH 10 SACKS CEMENT TO SURFACE.

RECEIVED
STATE CORPORATION COMMISSION
6-6-58
JUN 6 1958
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor EMPIRE DRILLING COMPANY
Address 650 FOURTH NATIONAL BANK BUILDING, WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
I, DAN J. KORNFELD (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
650 FOURTH NATIONAL BANK BUILDING
(Address)

SUBSCRIBED AND SWORN TO before me this 4TH day of JUNE, 19 58

My commission expires JULY 2, 1958 [Signature] Notary Public.

PLUGGING
FILE SEC. 18 T. 10 R. 25W
BOOK PAGE 104 LINE 31

15-065-02144-0000

LOG

COMPANY: EMPIRE DRILLING COMPANY AND N. C. R. A., WICHITA, KANSAS
 CONTRACTOR: EMPIRE DRILLING COMPANY, WICHITA, KANSAS
 FARM: KRUG "A" # 3
 LOCATION: SW NE SE SECTION 18-10-25W, GRAHAM COUNTY, KANSAS
 COMMENCED: MAY 22, 1958 ELEVATION; 2571 KB
 COMPLETED: MAY 31, 1958


0	TO	196	SHALE AND SAND
196	TO	915	SHELLS AND SHALE
915	TO	2185	SHALE AND SHELLS
2185	TO	2235	ANHYDRITE
2235	TO	2665	SHALE AND SHELLS
2665	TO	3270	SHALE AND LIME
3270	TO	3710	LIME AND SHALE
3710	TO	4010	LIME
		4010	RTD

SET: 8 5/8" 164' WITH 100 SACKS CEMENT

TOPS: HEEBNER 3782
 TORONTO 3805
 LANSING KANSAS CITY 3825

CERTIFICATION

I, DAN J. KORNFELD, DO HEREBY CERTIFY THAT THE ABOVE AND FOREGOING IS A TRUE AND CORRECT COPY OF THE LOG ON THE KRUG "A" # 3, SW NE SE, SECTION 18-10-25W, GRAHAM COUNTY, KANSAS, AS REFLECTED BY THE FILES OF THE EMPIRE DRILLING COMPANY.


 DAN J. KORNFELD

SUBSCRIBED AND SWORN TO BEFORE ME, A NOTARY PUBLIC WITHIN AND FOR SEDGWICK COUNTY, KANSAS, THIS 4TH DAY OF JUNE, 1958


 HAZEL PIERSON, NOTARY PUBLIC

MY COMMISSION EXPIRES JULY 2, 1958

PLUGGING
 FILE SEC 18 T. 10. R. 25W
 BOOK PAGE 104 LINE 31