

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
March 2009
This Form must be Typed
Form must be Signed
All blanks must be Filled

OPERATOR: License #: 5205
Name: Mid-Continent Energy Corporation
Address 1: 105 S. Broadway, Suite 360
Address 2: _____
City: Wichita State: KS Zip: 67202 + _____
Contact Person: Jack Buehler
Phone: (316) 265-9501

API No. 15 - 165-21625-0000
If pre 1967, supply original completion date: _____
Spot Description: _____
NW SE NE Sec. 33 Twp. 18 S. R. 20 East West
1,650 Feet from North / South Line of Section
990 Feet from East / West Line of Section
Footages Calculated from Nearest Outside Section Corner:
 NE NW SE SW
County: Rush
Lease Name: Janke Well #: 1

Handwritten: Well 499/10

Check One: Oil Well Gas Well OG D&A Cathodic Water Supply Well Other: shut-in oil well
 SWD Permit #: _____ ENHR Permit #: _____ Gas Storage Permit #: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks
Surface Casing Size: 8 5/8 Set at: 235 Cemented with: 175 Sacks
Production Casing Size: 5 1/2 Set at: 4147 Cemented with: 100 Sacks

List (ALL) Perforations and Bridge Plug Sets:

No perforations. Open hole

Elevation: 2165 (G.L. / K.B.) T.D.: 4161 P.B.T.D.: _____ Anhydrite Depth: top 1401 B/Anh 1432
(Stone Corral Formation)

Condition of Well: Good Poor Junk in Hole Casing Leak at: _____
(Interval)

Proposed Method of Plugging (attach a separate page if additional space is needed):

run a cast iron bridge plug over the cherokee, cement with 2 sx 60x40 poz mix cement. pressure up to be sure there are no holes in casing. Perf. at 650', 50' below the permian, water depth. circulate cement from surface down 5 1/2 inch casing up to surface

Is Well Log attached to this application? Yes No Is ACO-1 filed? Yes No

If ACO-1 not filed, explain why:

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission

Company Representative authorized to supervise plugging operations: Tom Casey

Address: P. O. Box 19 City: Victoria State: KS Zip: 67671 + _____

Phone: (785) 735-4310

Plugging Contractor License #: 6426 Name: Express Well Service \$ Supply

Address 1: P. O. Box 19 Address 2: _____

City: Victoria State: KS Zip: 67671 + _____

Phone: (785) 735-9405

Proposed Date of Plugging (if known): _____

RECEIVED
KANSAS CORPORATION COMMISSION


APR 16 2010

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 4-14-2010 Authorized Operator / Agent: Jack Buehler (Signature)

CONSERVATION DIVISION
WICHITA, KS

Handwritten signature

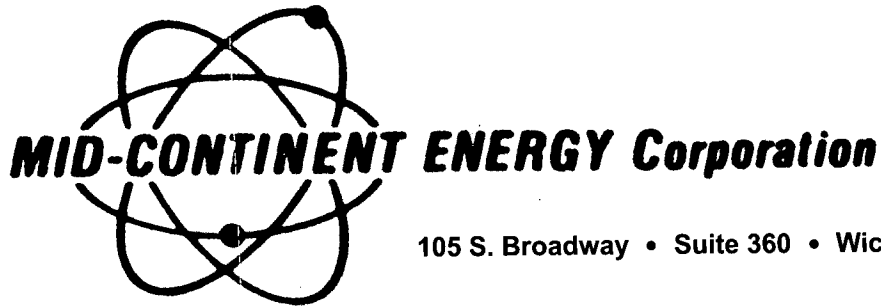

April 15, 2010

Kansas Corporation Commission
Conservation Division
130 S. Market – Room 2078
Wichita, KS 67202

RE: Janke #1 well - API: 15-165-21625
SE $\frac{1}{4}$ of Section 33-T18S-R20W
Rush County, Kansas

Dear Sirs:

Enclosed with this letter is Form CP-1. Well Plugging Application. I have talked to the people in the KCC District 1 office about the plan to plug the Janke #1 well. They asked me to send the form to the KCC office in Wichita. I have lined up Express Well Service to plug the Janke #1 well at their convenience.

Please review the Application and let me know if you have any questions.

Sincerely,
Mid-Continent Energy Corporation

Jack N. Buehler

Cc: Richard Lacey, KCC District 1
Tom Casey, Express Well Service

RECEIVED
KANSAS CORPORATION COMMISSION

APR 16 2010

CONSERVATION DIVISION
WICHITA, KS



CORPORATION COMMISSION

Mark Parkinson, Governor Thomas E. Wright, Chairman Joseph F. Harkins, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

MID-CONTINENT ENERGY CORP.
105 S BROADWAY STE 360
WICHITA, KS 67202-4280

April 21, 2010

Re: JANKE #1
API 15-165-21625-00-00
33-18S-20W, 3630 FSL 990 FEL
RUSH COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division has received your plugging proposal, form CP-1, for the above well and has reviewed the proposal for completeness. The central office will now forward your CP-1 to the district office listed below for review of the proposed plugging method. **Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit in accordance with K.A.R. 82-3-600.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. This notice in no way constitutes authorization to plug the above well by persons not having legal rights of ownership or interest in the well.

This notice is void after October 18, 2010. The CP-1 filing does not bring the above well into compliance with K.A.R. 82-3-111 with regard to the Commission's temporary abandonment requirements.

Sincerely

Steve Bond
Production Department Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888