


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Sheridan County, Sec. 14 Twp. 10S Rge. 26W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines \_\_\_\_\_  
NE SW NE  
Lease Owner Hinkle Oil Company  
Lease Name Wilson #3 Well No. \_\_\_\_\_  
Office Address Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

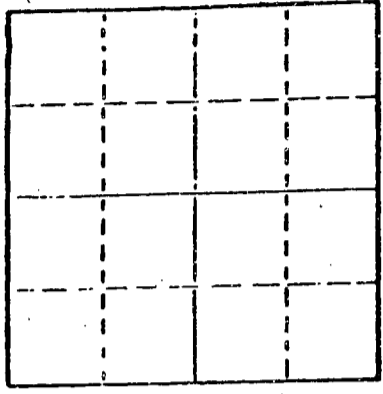

Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 6/14/77 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 6/22/77 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_  
depleted.  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4070  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	250	none
				5 1/2	4069	1104'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed wood plug to 3800', sanded to 3760' and ran 4 sacks cement. Loaded hole with salt water, shot pipe at 2523', 2305', 2023', 1809', 1625', 1415', 1325', 1227', 1103', pulled 36 joints. Pumped 4 sacks hulls, 70 sacks cement, 11 sacks gel. Released plug and ran 60 sacks cement.

PLUGGING COMPLETE. 6-29-77  
JUN 29 1977

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

Subscribed and Sworn to before me this 27th day of June, 19 77

My commission expires \_\_\_\_\_  
NOTARY PUBLIC  
**MARGARET MELCHER**  
Rice County, Ks.  
My Comm. Exp. Feb. 15, 1979

Margaret Melcher  
Notary Public.

DRILLERS LOG

No. 3 Wilson

CASING RECORD:	COMPANY:	Hinkle Oil Company	DESCRIPTION:
8 5/8" @ 250' w/180 sx cement	CONTRACTOR:	Red Tiger Drilling Company	NE SW NE 14-10S-26W Sheridan County, Kansas
5 1/2" @ 4089' w/200 sx cement	COMMENCED:	May 15, 1972	
	COMPLETED:	May 23, 1972	
TOTAL DEPTH: 4070'			ELEVATION:


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sod & Sand	0	100	
Shale	100	1190	
Shale & Sand Shells	1190	1760	
Red Bed & Sand	1760	1770	
Sand	1770	1975	
Red Bed	1975	2187	
Anhydrite	2187	2227	
Shale	2227	2779	
Shale & Lime	2779	3710	
Lime	3710	4070	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

*Jim Farrice*  
Jim Farrice

Subscribed and sworn to before me this 23th day of May, 1972.



*Virginia K. Albert*  
Notary Public

RECEIVED  
STATE COMMISSION  
MAY 16 1972  
COMMERCIAL BANK