


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-195-01406-00-00
WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

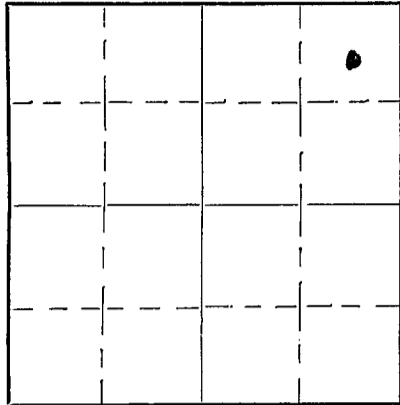

Locate well correctly on above
Section Plat

Trego County, Sec. 13 Twp. 12 Rge. (E) 23 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE NE
Lease Owner J. E. Trigg.
Lease Name Marie Rasek Well No. 1
Office Address 1109 1st National Bldg., Oklahoma City, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole.
Date, well completed 4-15-40 193
Application for plugging filed 4-16-40 193
Application for plugging approved 4-16-40 193
Plugging Commenced 4-16-40 193
Plugging Completed 4-16-40 193
Reason for abandonment of well or producing formation Dry hole.

If a producing well is abandoned, date of last production None 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander.
Producing formation None Depth to top Bottom Total Depth of Well 4209 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand.	Water.	135	168	10 3/4	174	None
"	"	675	770			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

While breaking down drill pipe filled hole every 800 feet with heavy mud from 4209 feet to 174 feet then bridged hole at 174 feet and pumped in 10 sacks cement on top of plug, filled with mud to 6 feet below bottom of cellar and bridged again and put cement on top of plug to bottom of cellar using 5 sacks of cement.

13 12 23 W
99 31

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. E. Trigg.
Address 1109 1st National Bldg., Oklahoma City, Okla.

04-18-1940

STATE OF Oklahoma, COUNTY OF Oklahoma, ss. J. E. Trigg

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

1109 1st National Bldg., Oklahoma City, Okla.
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of April 19 40

[Signature] Notary Public.

My commission expires April 22, 1941

WELL LOG

15-195-01406-00-00

J. E. TRIGG.

OKLAHOMA CITY, OKLAHOMA.

RASEK #1: NE NE Section 13, Twp 12S, Range 23 W.
Trego County, Kansas.

Elevation: 2417 feet.
Started: March 14, 1940.
Completed: April 15, 1940

Surface.	0- 174	Lime.	3682-3967
Shale.	174- 230	Shale.	3967-4024
Lime.	230- 293	Chert.	4024-4059
Shale.	293- 675	Conglomerate and shale.	4059-4110
Sand.	675- 770	Simpson shale.	4110-4124
Shale and sand.	770-1170	Lime.	4124-4209
Shale and shells.	1170-1230		
Shale and sand.	1230-1600		
Shale and shells.	1600-1834	Set 174 feet 10 3/4" surface pipe	
Lime.	1834-1895	and cemented with 200 sacks cement.	
Shale and shells.	1895-2190		
Salt.	2190-2325		
Shale and shells.	2325-2364		
Lime.	2364-2384		
Shale.	2384-2493		
Shale and shells.	2493-2581		
Lime.	2581-2648		
Shale and shells.	2648-2757		
Lime.	2757-2776		
Shale and shells.	2776-2899		
Lime.	2899-2929		
Shale and shells.	2929-3075		
Lime.	3075-3110		
Shale and shells.	3110-3307		
Lime.-	3307-3394		
Shale and shells.	3394-3536		
Lime.	3536-3554		
Shale.	3554-3566		
Lime.	3566-3668		
Shale.	3668-3682.		

I, J. E. Trigg, of Oklahoma City, Oklahoma, do hereby certify that the above and foregoing is a true and correct copy of the well log of the Rasek #1 well as reflected by my records.

J. E. Trigg

Subscribed and sworn to before me this 17th day of April, 1940.

A. C. Williams
Notary Public.

My Commission expires April 22, 1941.

13 12 23W
99 31

04-18-1940