


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

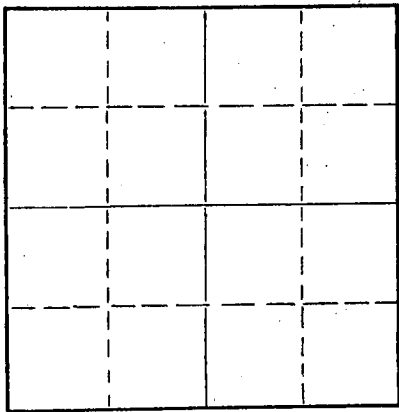

Locate well correctly on above
Section Plat

Trego County. Sec. 22 Twp. 12S Rge. 23W (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines NW NW SE
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Deines Well No. 1
Office Address 903 Union National Bank Bldg. Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 2, 19 56
Application for plugging filed April 2, 19 56
Application for plugging approved April 2, 19 56
Plugging commenced April 2, 19 56
Plugging completed April 2, 19 56
Reason for abandonment of well or producing formation No show of oil.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Great Bend, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4380 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	4-2-56	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set No. 1 plug at 200' with 1/2 sack hulls and 15 sacks cement. Set No. 2 plug at 40' with 1/2 sack hulls and 10 sacks cement.

04-21-1956


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Imperial Oil of Kansas, Inc.
Address 903 Union National Bank Bldg. Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick ss.
Raymond L. Bacon (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. IMPERIAL OIL OF KANSAS, INC.
By: *Raymond L. Bacon* V-P
903 Union National Bank Bldg. Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of April, 1956

Francis E. Puckham Notary Public.

My commission expires April 18, 1959



DRILLER'S LOG

Imperial Oil of Kansas, Inc.
903 Union National Bank Bldg.
Wichita 2, Kansas

Deines No. 1
NW NW SE Sec. 22-12S-23W
Trego County, Kansas

Total Depth: 4380'

Elevation: 2402' R.B.
Production: D & A

Commenced: 3-20-56 Completed: 4-2-56

Contractor: Imperial Oil of Kansas, Inc.
Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 205' with 175 sacks cement.

Figures indicate bottom of formations:

Sand and Shale	205'		
Shale and Shells	670'		
Sand, Shale and Shells	1680'		
Shale and Shells	1848'		<u>TOPS</u>
Anhydrite	1897'	Anhydrite	1848' (/554)
Shale and Shells	2315'	Lansing	3705' (-1303)
Shale and Lime Streaks	2505'	Base K.C.	3953' (-1551)
Shale and Shells	2705'	Conglomerate	4184' (-1782)
Shale and Lime	3605'	Arbuckle	4337' (-1935)
Lime	3645'	Total Depth	4380' (-1978)
Lime and Shale	3710'		
Lime	4230'		
Chert	4250'		
Chert and Shale	4285'		
Lime	4350'		
Arbuckle	4380'		
Total Depth	4380'		

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1956

IMPERIAL OIL OF KANSAS, INC.

CONSERVATION DIVISION
Wichita, Kansas

By: [Signature]
Vice-President

Subscribed and sworn to before me this 19th day of April, 1956.

My Commission Expires:

April 18, 1959

PLUGGING
FILE SEC 22 T 12 R 23W
BOOK PAGE 52 LINE 7

[Signature]
Notary Public