

15-195-20292-00-00

FORM CP-4


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Trego County, Sec 22 Twp 12S Rge 23W (E) (W)

Location as "NE/CNWSW" or footage from lines SW NW NE  
Lease Owner Beren Corporation  
Lease Name Donald Well No. 1  
Office Address 1130 Vickers-KSB&T Bldg., Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed December 23 1974  
Application for plugging filed December 23 1974  
Application for plugging approved December 23 1974  
Plugging commenced December 23 1974  
Plugging completed December 23 1974  
Reason for abandonment of well or producing formation D & A

NORTE

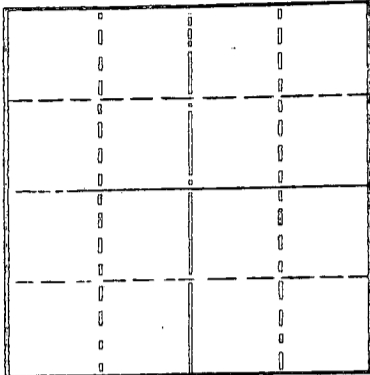

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W. J. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3390' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	FILLED OUT
				8-5/8"	260'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 800' w/70 sx. 2nd plug @ 240' w/20 sx.  
3rd plug @ 40' w/10 sx. cmt.  
Cmt. was 50-50 pozmix, 6% gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company  
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.  
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens  
1720 Wichita Plaza, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of December 1974

My commission expires December 28, 1977

*[Signature]*  
Notary Public.



15-195-20292-00-00

DRILLERS LOG

No. 1 Donald

CASING RECORD:

3-5/8" @ 260'  
w/165 sx. cnt.

TOTAL DEPTH: 3390'

COMPANY:

CONTRACTOR:

COMMENCED:

COMPLETED:

Beren Corporation

Red Tiger Drilling Company

December 17, 1974

December 23, 1974

DESCRIPTION:

SW 1/4 NE  
22-129-23N  
Trego County,  
Kansas

ELEVATION: 2419' K.B.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale, Sand & Shale	0	265	
Post Rock & Shale	265	1060	
Shale & Sand	1060	1310	
Sand	1310	1600	
Shale & Sand	1600	1855	
Redbed	1855	1870	
Anhydrite	1870	1905	
Redbed & Shale	1905	2048	
Shale	2048	2454	
Shale & Lime	2454	2570	
Shale	2570	2795	
Lime & Shale	2795	3120	
Lime	3120	3390	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens  
Linda H. Dickens

Subscribed and sworn to before me this 26th day of December, 1974.

D. Ann Drennan  
Notary Public

My Commission Expires:

December 28, 1977

