


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

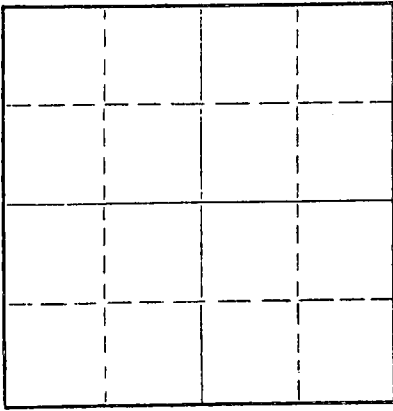

Locate well correctly on above
Section Plat

Trego County. Sec. 28 Twp. 12~~5~~ Rge. (E) 24 (W)
Location as "NE/CNW~~2~~SW~~4~~" or footage from lines NW NW NW
Lease Owner CHIEF DRILLING CO., INC.
Lease Name ZEMAN Well No. 1
Office Address P.O. Box 797, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 6 19 61
Application for plugging filed October 6 19 61
Application for plugging approved October 6 19 61
Plugging commenced October 6 19 61
Plugging completed October 6 19 61
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Box 326, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4087 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	200	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1/3 sack hulls and wooden plug at 540'
Mixed 20 sacks cement through drill pipe.
1/3 sack hulls and wooden plug at 180'
Mixed 20 sacks cement through drill pipe.
1/3 sack hulls and wooden plug at 40'
Mixed 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
10-18-1961
OCT 18 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor CHIEF DRILLING CO., INC.
Address P.O. Box 797, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. Richard Hoover
P.O. Box 797, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of October, 19 61

Dorothy B. John
Dorothy B. John Notary Public.

My commission expires June 18, 1963



15-195-00391-00-00

WELL LOG

Chief Drilling Co., Inc.
P.O. Box 707
Great Bend, Kansas

No. 1 Zeman
NW NW NW Sec. 28-12S-24W
Trego County, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 9-28-61
Completed: 10-6-61

CASING RECORD: 8-5/8" @ 200' with 150 sacks Sunset cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Sand & Shale	0	199	2450' Gr.
Shale & Shells	199	1180	2452' D.F.
Sand & Shale	1180	1280	2455' K.B.
Redbed and Shale	1280	1490	
Sand	1490	1760	
Shale	1760	2010	
Anhydrite	2010	2060	<u>FORMATION TOPS</u> Anhydrite 2010
Shale & Shells	2060	2625	Topeka 3557
Shale & Lime	2625	2900	Heebner 3778
Lime	2900	3778	Toronto 3802
Shale & Lime	3778	3802	Lansing 3819
Lime	3802	4074	B/Kansas City 4074
Shale	4074	4087	
Total Depth	4087		

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the NW NW NW Sec. 28-12S-24W, Trego County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
V. Richard Hoover, President

Subscribed and sworn to before me this 9th day of October, 1961.

Dorothy B. John
Dorothy B. John, Notary Public

My commission expires: June 13, 1963

11-27-1961